

Burden Hour Statement. This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

FEE TRANSMITTAL for FY 2001

Patent fees are subject to annual revision

TOTAL AMOUNT OF PAYMENT (\$)**750.00**

Complete if Known

Application Number	Unknown
Filing Date	November 28, 2000
First Named Inventor	Stephen M. Trimberger
Examiner Name	Unknown
Group /Art Unit	Unknown
Attorney Docket No.	X-805-8 US

METHOD OF PAYMENT

1. ☒ The Commissioner is hereby authorized to charge indicated fees and credit any over payments to:

Deposit
Account
Number

Deposit
Account
Name

24-0040

XILINX, INC.

☐ Charge Any Additional Fee Required
Under 37 CFR §§ 1.16 and 1.17

2. ☐ Payment Enclosed:
☐ Check ☐ Money Order ☐ Other

FEE CALCULATION

1. BASIC FILING FEE

Large Entity		Fee Description	Fee Paid
Fee Code	Fee (\$)		
101	710	Utility filing fee	\$710
106	320	Design filing fee	
107	490	Plant filing fee	
108	710	Reissue filing fee	
114	150	Provisional filing fee	
SUBTOTAL (1)		(\$)	710.00

2. EXTRA CLAIM FEES

Total Claims	Extra	Fee from below	Fee Paid
20	-20** =	0	\$0
Indep. Claims	03	- 3** =	0
Multiple Dependent			

Large Entity		Fee Description	Fee Paid
Fee Code	Fee (\$)		
103	18	Claims in excess of 20	
102	80	Independent claims in excess of 3	
104	270	Multiple dependent claim, if not paid	
109	80	**Reissue independent claims over original patent	
110	18	**Reissue claims in excess of 20 and over original patent	
SUBTOTAL (2)		(\$)	0.00

**or number previously paid, if greater; For Reissues, see above

FEE CALCULATION (continued)

3. ADDITIONAL FEES

Large Entity Fee Code	Fee (\$)	Fee Description	Fee Paid
105	130	Surcharge - late filing fee or oath	
127	50	Surcharge - late provisional filing fee or cover sheet.	
147	2,520	For filing a request for reexamination	
112	920*	Requesting publication of SIR prior to Examiner action	
113	1,840*	Requesting publication of SIR after Examiner action	
115	110	Extension for reply within first month	
116	390	Extension for reply within second month	
117	890	Extension for reply within third month	
118	1,390	Extension for reply within fourth month	
128	1,890	Extension for reply within fifth month	
119	310	Notice of Appeal	
120	310	Filing a brief in support of an appeal	
121	270	Request for oral hearing	
138	1,510	Petition to institute a public use proceeding	
140	110	Petition to revive - unavoidable	
141	1,240	Petition to revive - unintentional	
142	1,240	Utility issue fee (or reissue)	
122	130	Petitions to the Commissioner	
123	50	Petitions related to provisional applications	
126	240	Submission of Information Disclosure Stmt	
581	40	Recording each patent assignment per property (times number of properties)	\$40
146	710	Filing a submission after final rejection (37 CFR 1.129(a))	
149	710	For each additional invention to be examined (37 CFR 1.129(b))	
179	710	Request for Continued Examination (RCE)	
Other fee (specify)			

*Reduced by Basic Filing Fee Paid SUBTOTAL (3) (\$)**40.00**

SUBMITTED BY

Name (Print/Type) **Keith A. Chanroo**
 Signature 

Registration No. **36,480**
 (Attorney/Agent)

Complete (if applicable)
 Telephone **408-879-7710**
 Date **11-28-2000**

WARNING: Information on this form may become public. Credit card information should not be included on this form. Provide credit card information and authorization on PTO-2038.

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

1 BITSTREAM FOR CONFIGURING A PLD
2 WITH ENCRYPTED DESIGN DATA
3

4 Stephen M. Trimberger
5 Raymond C. Pang
6 Walter N. Sze
7 Jennifer Wong
8 Kameswara K. Rao
9

10 FIELD OF THE INVENTION

11 The invention relates to PLDs, more particularly to protection of designs
12 loaded into a PLD through a bitstream.
13

14 BACKGROUND OF THE INVENTION

15 A PLD (programmable logic device) is an integrated circuit structure that
16 performs digital logic functions selected by a designer. PLDs include logic blocks
17 and interconnect lines and typically both the logic blocks and interconnections are
18 programmable. One common type of PLD is an FPGA (field programmable logic
19 device), in which the logic blocks typically include lookup tables and flip flops,
20 and can typically generate and store any function of their input signals. Another
21 type is the CPLD (complex programmable logic device) in which the logic blocks
22 perform the AND function and the OR function and the selection of input signals
23 is programmable.
24

25 Problem with storing bitstream external to PLD

26 Designs implemented in PLDs have become complex, and it often takes
27 months to complete and debug a design to be implemented in a PLD. When the
28 design is going into a system of which the PLD is a part and is to be sold for profit,
29 the designer does not want the result of this design effort to be copied by someone
30 else. The designer often wants to keep the design a trade secret. Many PLDs,
31 particularly FPGAs, use volatile configuration memory that must be loaded from
32 an external device such as a PROM every time the PLD is powered up. Since

1 configuration data is stored external to the PLD and must be transmitted through
2 a configuration access port, the privacy of the design can easily be violated by an
3 attacker who monitors the data on the configuration access port, e.g. by putting
4 probes on board traces.

5
6 Current solutions and their disadvantages

7 Efforts have been made to encrypt designs, but it is difficult to make the
8 design both secure from attackers and easy to use by legitimate users. The
9 encryption algorithm is not a problem. Several encryption algorithms, for
10 example, the standard Data Encryption Standard (DES) and the more secure
11 Advanced Encryption Standard (AES) algorithm, are known for encrypting blocks
12 of data. The process of cipher block chaining (CBC), in which an unencrypted
13 data word is XORed with the next encrypted data word before decryption allows
14 the DES or AES to encrypt a serial stream of data and these are therefore
15 appropriate for encrypting a bitstream for configuring a PLD. A key used for
16 encrypting the design must somehow be communicated in a secure way between
17 the PLD and the structure that decrypts the design, so the design can be decrypted
18 by the PLD before being used to configure the PLD. Then, once the PLD has been
19 configured using the unencrypted design, the design must continue to be
20 protected from unauthorized discovery.

21 A November 24, 1997 publication by Peter Alfke of Xilinx, Inc. entitled
22 "Configuration Issues: Power-up, Volatility, Security, Battery Back-up" describes
23 several steps that can be taken to protect a design in an existing FPGA device
24 having no particular architectural features within the FPGA to protect the design.
25 Loading design configuration data into the FPGA and then removing the source of
26 the configuration data but using a battery to maintain continuous power to the
27 FPGA while holding the FPGA in a standby non-operational mode is one method.
28 However, power requirements on the battery make this method impractical for
29 large FPGA devices.

Nonvolatile configuration memory is another possibility. If the design is loaded at the factory before the device is sold, it is difficult for a purchaser of the configured PLD device to determine what the design is. However, a reverse engineering process in which the programmed device is decapped, metal layers are removed, and the nonvolatile memory cells are chemically treated can expose which memory cells have been charged and thus can allow an attacker to learn the design. Further, nonvolatile memory requires a more complex and more expensive process technology than standard CMOS process technology, and takes longer to bring to market.

It is also known to store a decryption key in nonvolatile memory in a PLD, load an encrypted bitstream into the PLD and decrypt the bitstream using the key within the PLD. This prevents an attacker from reading the bitstream as it is being loaded into the PLD, and does retain the key when power is removed from the PLD. Such an arrangement is described by Austin in U.S. Patent 5,388,157. But this structure does not protect the user's design from all modes of attack.

In addition to design protection, some users need data protection. They may have generated data within the PLD that should not be lost when the PLD loses power. It is desirable to protect such data.

There remains a need for a design protection method that is convenient, reliable, and secure.

SUMMARY OF THE INVENTION

The invention provides several structures and methods for protecting a PLD from unauthorized use and data loss.

If the PLD is configured by static RAM memory that must be loaded on power-up, the configuration data must be protected as it is being loaded into the device. As in the prior art, this is accomplished by encrypting the configuration data for storing it in a memory outside the integrated circuit device, loading one or more decryption keys into the PLD and maintaining the keys in the PLD when powered down, including a decryption circuit within the PLD that uses the key to

1 decrypt the configuration data, generating decrypted configuration data within
2 the PLD and configuring the PLD using the decrypted configuration data.

3 For additional security, rather than using nonvolatile memory to preserve
4 keys, the invention preferably uses a battery connected to the PLD to preserve the
5 key when power is removed from the PLD. Whereas it is possible to remove a
6 PLD storing keys in nonvolatile memory, decap the PLD and observe which of the
7 nonvolatile bits are programmed to logic 1 and which are programmed to logic 0,
8 it is believed that it is very difficult to determine the contents of keys stored only
9 in static memory cells since power must be maintained to the memory cells storing
10 the keys in order for the keys to even be stored, and the PLD would have to be
11 decapped, delayered, and probed while operating power is continuous to the
12 PLD.

13
14 Ways an attacker can steal a design once loaded into a PLD

15 If a key does not offer sufficient security, an attacker may break the
16 encryption code and determine the value of the key. The well-known Data
17 Encryption Standard DES used a 56-bit encryption key, and has been broken in a
18 few hours by a sophisticated computer to reveal the key. DES is described by
19 Bruce Schneier in "Applied Cryptography Second Edition: protocols, algorithms,
20 and source code in C" copyright 1996 by Bruce Schneier, published by John Wiley
21 & Sons, Inc., at pages 265-278. If it is desirable to use such a well known
22 encryption standard, then in order to increase security, the configuration data may
23 be encrypted several times using different keys each time, thus strengthening the
24 encryption code by about 2^{56} each time the encryption is repeated. Or it may be
25 encrypted using a first key, decrypted using a second key, and encrypted using a
26 third key, a combination that is part of the triple DES standard. Other encryption
27 algorithms may also be used, and it is not necessary to keep the algorithm secret
28 since the security resides in the key. When the encryption method is symmetrical,
29 the same keys used for encryption are stored in the PLD and used in reverse order
30 for decryption.

1 In a PLD offering multiple keys, if the number of keys to be used and the
2 addresses of all keys were provided in an unencrypted bitstream, an attacker
3 might be able to attack the keys one at a time and more easily determine the key
4 values. To avoid such attack, additional security is achieved by storing within the
5 keys, not the bitstream, an indication of how many keys are to be used and
6 whether a key is the last key of a set or whether more are to follow.

7 If the PLD offers the option of reading back the bitstream after it has been
8 loaded into the PLD, another method that can be used by an attacker is to read
9 back this bitstream. To avoid this method of attacking the design, in one
10 embodiment, a PLD that offers readback and also offers encryption includes the
11 ability to disable the readback feature when encryption has been used. In another
12 embodiment, the PLD that offers the ability to read back encrypts the
13 configuration data before it is read back.

14 Additionally, some PLDs offer the option of partial configuration (where
15 several configuration addresses are specified for loading several portions of a
16 design) and partial reconfiguration (where an existing design is not erased before
17 new design data are loaded). If the PLD offers these options, an attacker could
18 partially reconfigure a PLD to make successive portions of the design visible, and
19 probably learn the whole design. To avoid such an attack, in one embodiment,
20 partial configuration and reconfiguration of PLDs loaded with encrypted designs
21 are disallowed. In another embodiment, several configuration addresses can be
22 specified, but the addresses are encrypted.

23 Yet another mode of attack is to try to flip a bit that indicates the security
24 status of the PLD. Lowering or raising the operating voltage, changing the
25 temperature, and applying noise to certain ports come to mind. To protect against
26 such bit-flipping, when the PLD is operating with a secured bitstream, a secure-
27 mode flag is set, and in one embodiment, if this flag becomes unset, all
28 configuration data is erased. In another embodiment that doesn't allow for
29 reconfiguration while the device is still operating, the configuration data is erased
30 before any bitstream is sent.

1 Another mode of attack is to relocate portions of the encrypted bitstream so
2 that when they are unencrypted they are placed into visible portions of the PLD
3 not intended by the designer. To prevent this relocation, address information is
4 used in the encryption and decryption processes so that sending a portion of an
5 encrypted bitstream to a different PLD location from that intended by the designer
6 will cause it to decrypt differently into data with no meaning. Cipher block
7 chaining (CBC) is one effective means of achieving this result. In cipher block
8 chaining, the decrypted data packet (block) is combined using the XOR function
9 with the next data block before the next block is decrypted, thus the encrypted
10 data for each data block depends on every block that preceded it and on the order
11 of those blocks. Identical blocks of data will encrypt to different values depending
12 on the value of the data blocks that preceded them. This way, if the order of the
13 blocks is changed, the bitstream will not decrypt correctly because the place where
14 the encrypted bitstream is rearranged will scramble subsequent data. Further, the
15 initial CBC value can be modified to incorporate the address of the data to force
16 the decrypted data to be placed at a specific location in order to decrypt correctly.

17 Alternatively, if the PLD allowed part of a design to be encrypted and part to
18 be unencrypted, the attacker could add an unencrypted portion to the encrypted
19 portion that would read out information about the encrypted portion of the
20 design. Thus, additional security is achieved by permitting the design to be totally
21 encrypted or totally unencrypted, but not to be mixed. Further to this, in one
22 embodiment, when data are being encrypted, additional security is provided by
23 allowing only a single full-chip configuration following a single starting address
24 for the configuration data.

25 Further, in order to allow convenient testing and debugging and to allow the
26 PLD manufacturer to communicate freely with its customers (the designers who
27 produce the designs for configuring the PLD), the PLD has both encrypted and
28 unencrypted modes of operating, and when operating in the encrypted mode,
29 parts of the configuration bitstream that control loading of the configuration data
30 into the PLD are still not encrypted.

1 As another mode of attack, if the PLD manufacturer gives information freely
2 about the configuration bitstream format, including header information and
3 addresses for loading configuration data, and gives information about the
4 encryption method used, encrypting this well known information would expose
5 the encryption key to possible discovery. Such exposure is avoided by encrypting
6 only the actual configuration data and leaving control information unencrypted.

7 If the PLD manufacturer allows the key memory to be used in both secure
8 and non-secure modes, an attacker could simply learn the keys by placing the key
9 memory into non-secure mode and reading out the keys. To avoid such attack,
10 the PLD manufacturer includes a circuit that causes all keys plus any
11 configuration data loaded into the PLD to be erased when the key memory is
12 moved to non-secure mode.

14 BRIEF DESCRIPTION OF THE DRAWINGS

15 Fig. 1 shows functional relationships in a prior art FPGA.

16 Fig. 2a, 2b, 2c, and 2d show bitstream format and commands that can be
17 included in a prior art bitstream.

18 Fig. 3 shows functional relationships in an FPGA according to one
19 embodiment of the present invention.

20 Fig. 4a, 4b, 4c, and 4d show bitstream format and commands that can be
21 included in a bitstream of the present invention.

22 Fig. 5a and 5b show example unencrypted and encrypted bitstreams.

23 Fig. 6 shows configuration logic 29 and the lines in bus 27 and bus 28 leading
24 to decryptor 24.

25 Fig. 7a shows the modified starting value for outer cipher block chaining
26 with triple encryption used in one embodiment of the invention.

27 Fig. 7b shows the corresponding starting value and decryption process used
28 with Fig. 7a.

29 Fig. 8 shows flow of the operations for processing a bitstream.

Fig. 9 shows a state machine implemented by decryptor 24 to evaluate key order.

Fig. 10a shows the structure of key memory 23 of Fig. 3.

Fig. 10b shows the structure of the memory cells of Fig. 10a.

Fig. 11 shows the steps performed by control logic 23a of Fig. 10a to erase keys when made non-secure.

Fig. 12 shows in more detail the battery supply switch of Fig. 10a.

Figs. 13 and 14 show the level shift circuit and voltage detection circuit of the battery supply switch of Fig. 12.

Fig. 15 shows a state machine for erasing a design when a secure mode is exited.

Fig. 16 shows a block diagram of elements for loading configuration memory and reading back configuration, including lines disabled when encryption is present.

DETAILED DESCRIPTION

Fig. 1 shows a prior art structure for an FPGA 10. The FPGA includes programmable logic 11, typically comprising (1) logic blocks with lookup table combinatorial logic function generators, flip flops for storing lookup table outputs and other values, and multiplexers and logic gates for enhancing the logic ability of the programmable logic (2) routing lines and programmable interconnection points for routing signals around the FPGA, and (3) input/output blocks for driving signals between the routing lines and the external pins of the FPGA.

The FPGA also includes configuration memory 12 for turning on routing transistors, controlling multiplexers, storing lookup tables and controlling the input/output blocks, all of this for the purpose of configuring the FPGA to perform the function desired by the designer(s). Bus 16 connects configuration memory 12 to programmable logic 11 and is typically a distributed set of control lines located throughout the FPGA. Some Xilinx products (e.g. XC6200) have included a bus 17 by which programmable logic 11 causes configuration logic 14

1 to send programming information to configuration memory 12. Such a structure
2 is described by Kean in U.S. Patent 5,705,938.

3 FPGA 10 further includes a JTAG logic block 13 for interfacing with JTAG
4 port 20, especially intended for testing of the board in which the FPGA will be
5 placed. JTAG logic block 13 implements the IEEE standard 1532, which is a
6 superset of the IEEE standard 1149.1. JTAG allows debugging of a design at the
7 board level.

8 Finally FPGA 10 includes configuration logic 14 for responding to a
9 configuration bitstream from external source 15 on configuration access port
10 21 and for interfacing with JTAG logic block 13. The bitstream on configuration
11 access port 21 is treated as words, in one embodiment 32-bit words. Several of the
12 words, usually at or near the beginning of the bitstream, are used for setting up
13 the configuration process and include, for example, length of a configuration
14 memory frame, and starting address for the configuration data. Bus 19 allows
15 communication between configuration logic 14 and JTAG logic block 13 so that the
16 JTAG port can be used as another configuration access port. Bus 18 allows
17 communication between configuration logic block 14 and configuration memory
18 12. In particular, it carries addresses to select configuration frames in memory 12,
19 control signals to perform write and read operations, and data for loading into
20 configuration memory 12 or reading back from configuration memory 12.

21 Configuration Logic block 14 receives instructions and data, and processes
22 the data according to the instructions. These instructions come into configuration
23 logic 14 as a bitstream. An instruction, or header, is usually followed by data to
24 be acted upon. Fig. 2a shows an example bitstream structure. Header A specifies
25 an action and specifies that a single word, Data A, will follow. Header B specifies
26 an action and in this case specifies that 4 words of data will follow to be acted
27 upon.

28 Fig. 2b shows the default format (format type 001) for a 32-bit header word
29 in the bitstream used in the Virtex(R) devices available from Xilinx, Inc. (Virtex is a
30 registered trademark of Xilinx, Inc., assignee of the present invention). This

format includes three bits to indicate the format type (001), two bits to specify an op code, 16 bits for a configuration logic register address, and 11 bits for a word count. The op code can designate a read operation, a write operation, or no operation. For example, 00 can designate no operation, 01 can designate read and 10 can designate write. The 11 bits for word count can specify 2^{11} words or 2048 words. As shown in Fig. 2c, if the word count is greater than this, the word count bits in format type 001 are set to 00000000000 and the header of format type 001 is followed by a header of format type 2. Format type 2 uses 27 bits to specify word count, and can thus specify 2^{27} words or 2.68 million words.

Fig. 2d shows the kinds of control information that can be loaded into the registers of Configuration Logic 14 by headers for a Virtex bitstream. For example, a header (of format 001) having the configuration logic register address 0000 specifies that the next 32-bit data word should be loaded into the cyclic redundancy check (CRC) register. (Virtex devices use a 16-bit cyclic redundancy check value so some bits will be padded with 0's.) If the header includes an address 0001, the next data will be loaded into the Frame Address register in order to specify a frame (column) in configuration memory 12 to receive or provide data.

The Configuration Logic Register address (16 bits) shown in Fig. 2b provides the 4-bit values shown in the left column of Fig. 2d that select one of the registers in configuration logic 14 (Fig. 1) into which to place the next 32-bit data word. The Frame Length register (address 1011) specifies the length of the frame into which the configuration data will be loaded. (Frame length, or column height, depends upon the size of the PLD. Larger PLDs usually have taller columns or longer frames. Specifying the frame length in the bitstream and storing the frame length in a register rather than providing a different structure in the PLD for placing the data words into frames allows the internal configuration logic to be identical for PLDs of different sizes.)

For readback, a read command is placed in the op code field and the Frame Data Output register is addressed, followed by a Word Count (using Command

Header Format 2 if necessary). The specified number of words is read back from configuration memory 12, starting at the address specified in the Frame Address register, and shifted out on either configuration access port 21 or JTAG port 20. (Readback data is returned to the port that issued the readback instruction) .

Specifying a word count in a bitstream header or pair of headers (Figs. 2b and 2c) sets a counter that counts down as the data words are loaded. For many configuration logic register addresses the word count is 1. But if the bitstream header has a configuration logic address of 0010 or 0011 to indicate configuration data are being loaded in or read back, the word count will be much larger. This is when header format 2 of Fig. 2c is used. Data loaded into configuration memory 12 through the frame data input register (address 0010) or read out through the frame data output register (address 0011) is called the design data because it causes the FPGA to implement a design or shows the status of a design. The other register data are control data since they control how the configuration logic behaves while the logic is being configured or read back.

Further detail about configuration of Virtex devices can be found in the "Virtex Configuration Guide" published October 9, 2000 by Xilinx, Inc. (assignee of the present invention), 2100 Logic Drive, San Jose, CA 95124. This configuration guide is incorporated herein by reference.

Configuration logic 14 typically performs a cyclic redundancy check on a configuration bitstream coming in (see Erickson, U.S. Patent 5,321,704 incorporated herein by reference, or see pages 39 through 40 of the above referenced Virtex Configuration Guide), reads header bits indicating the frame length of the part being configured and the word count of the configuration data, reads address instructions identifying where to load configuration data, collects frames of configuration data and loads them into columns of configuration memory 12 indicated in the addresses. Configuration logic 14 also controls readback of configuration data and flip flop values from configuration memory 12 to an external location. In a Virtex FPGA available from Xilinx, Inc., readback can be done through either JTAG port 20 or through configuration access port 21.

1 Configuration logic 14 can also receive configuration data from
2 programmable logic 11. More information about prior art FPGA structures in
3 which part of the FPGA configures another part of the FPGA can be found in
4 Kean, U.S. Patent 5,705,938. More information about architectures of FPGAs
5 similar to the Virtex architecture can be found in Young et al., U.S. Patent
6 5,914,616. Both patents are incorporated herein by reference. The format of a
7 bitstream used with the Virtex product available from Xilinx, Inc., assignee of the
8 present invention, is described in an Application Note, XAPP138, entitled "Virtex
9 FPGA Series Configuration and Readback" available from Xilinx, Inc., 2100 Logic
10 Drive, San Jose, CA 95124 published Oct. 4, 2000.

11
12 PLD with Decryption

13 Fig. 3 shows a block diagram of an FPGA (a type of PLD) according to one
14 embodiment of the present invention. Some elements are the same as shown in
15 Fig. 1, are given the same reference numbers, and not explained again. In
16 addition, Fig. 3 includes an expanded configuration logic unit 29, a decryptor 24
17 and a key memory 23. Fig. 3 shows an embodiment in which key memory 23 is
18 loaded on bus 25 from JTAG access port 20. In other embodiments, key memory
19 23 is loaded through another port. Bus 25 carries data, addresses, and control
20 signals to perform write and read operations and allows programming of the
21 decryption keys from JTAG port 20. In one embodiment, bus 26 allows
22 programming of the keys from the configuration port. In another embodiment,
23 bus 26 is eliminated. In yet another embodiment, bus 26 is present and bus 25 is
24 eliminated. In an embodiment described further herein, bus 26 carries security
25 data from key memory 23 to configuration logic 29. In one embodiment, bus 27
26 carries encrypted configuration data from configuration logic 29 to decryptor 24
27 and carries decrypted configuration data back to configuration logic 29. Bus 28
28 allows decryptor 24 to access the keys for decrypting data. When the structure of
29 Fig. 3 is being loaded with encrypted data, an attacker who monitors the bitstream

1 encrypted configuration data begins. Fig. 4a shows an example in which three
2 header words Header A, Header B, and Header C are each followed by three
3 unencrypted control data words Data A, Data B, and Data C. (In an actual
4 configuration, more than three control data words will likely be provided.) Next,
5 Header D specifies that encrypted configuration data will follow and is followed
6 by multiple words Data 1D, Data 2D, Data 3D, etc. of encrypted configuration
7 data. These words have been shaded in Fig. 4a to emphasize that this data is
8 encrypted.

9 As shown in Figs. 4b and 4c, a fourth op code has been added. In addition to
10 the values 00 for no operation, 01 and 10 for read and write without decryption,
11 the new value 11 specifies that writing is to be with decryption. (It is not
12 important what code or what method is used to specify that decryption is to be
13 used or even that it is specified through an op code. It is just important that
14 optional encryption and decryption be allowed and indicated, so that designers
15 can make use of this option. In the embodiment of Fig. 4d, two new configuration
16 logic registers are added. Shown at addresses 1100 and 1101 are the register for
17 holding a cipher block chaining (CBC) starter value and the address for the initial
18 encryption key.

20 Optional Encryption

21 According to another aspect of the invention, a PLD can accept both
22 encrypted and unencrypted data portions of the bitstream. The control portion of
23 the bitstream indicates whether the data portion of the bitstream is encrypted. If
24 the data portion of the bitstream is encrypted, it is diverted within the PLD to a
25 decryptor and after decryption is used to configure the PLD. If unencrypted, it is
26 not diverted, and is used directly to configure the PLD.

27 There are some occasions for which it is preferable not to encrypt the
28 bitstream. Certain test activities used during debugging a design require reading
29 back the configuration information. It is more straight forward to diagnose a
30 configuration problem if an encryption step has not been performed (especially if

1 the designer is trying to determine whether encryption has anything to do with
2 the problem). Also, if several designers are writing code to be implemented in
3 parts of the PLD and different parts of the PLD are to be configured at different
4 times, it may be necessary to make all portions of the bitstream visible, and to
5 allow the PLD to be partly reconfigured.

6 Figs. 5a and 5b show example bitstream portions representing the same
7 design, first unencrypted and then encrypted, to illustrate the differences between
8 an unencrypted bitstream and an encrypted bitstream in one embodiment of the
9 invention. An actual bitstream includes the 0's and 1's at the right of the figures
10 and none of the text at the left. The text at the left is provided to explain the
11 meaning of the bits to the right. These bitstream portions use the commands
12 illustrated in Figs. 4b-4d. In order to emphasize the differences between the
13 unencrypted version of Fig. 5a and the encrypted version of Fig. 5b, the
14 differences are shown in bold.

15 Looking at Fig. 5a, after a dummy word (a constant high signal interpreted
16 as all 1's) and a sync word with a specified pattern of 1's and 0's, the next word is
17 of type 001 with an op code of 10, has an address of 0000000000010000 and a word
18 count of 00000000001. Thus this word addresses the command register CMD and
19 specifies that one word will be written there. Fig. 5a has been annotated to the left
20 of the bitstream to indicate that this word is Type 1 and indicates to write 1 word
21 to CMD. The following word 111 is the data to be placed in command register
22 CMD, and resets a CRC (cyclic redundancy check) register. (In a preferred
23 embodiment, the PLD includes a circuit, not shown, such as described by
24 Erickson in U.S. Patent 5,598,424 to calculate a CRC value from the bitstream as
25 the bitstream is being loaded, and protects against glitches in the bitstream
26 voltages that might cause incorrect bits to be loaded.) Next, a header word
27 specifies that the format is again type 1 and it specifies to write 1 word to the
28 frame length register FLR. The data word that follows, 11001, specifies the frame
29 length (25 words). Similarly, several additional header and data words follow,
30 including the header specifying the word to be written to the frame address

1 register FAR. In this case, the following data word indicates data will start at
2 address 0. Finally, after these registers have been loaded, a command comes to
3 write data to the frame data input register FDRI, and since quite a bit of data will
4 be written, the word count is given as 00000000000 and a header of type 2 specifies
5 that 10530 words will be written to the FDRI register. This is the actual design
6 data that causes the PLD to be configured. Thus the next 10530 words in the
7 bitstream are design data. Finally, to assure that data have been loaded correctly,
8 the CRC value calculated by the device that originated the configuration data is
9 loaded and compared to the CRC value that has been calculated by the PLD.
10 Additional commands and data are loaded in order to indicate that configuration
11 is complete and to move the PLD into operation mode.

12 Fig. 5b is similar to Fig. 5a, and differs only where the data and annotations
13 are shown in bold. In Fig. 5b, the data are encrypted, and additional commands
14 are used to provide the initial key address and to write two words (64 bits) to the
15 CBC (cipher block chaining) register. Next, a type 1 header includes the op code
16 11 and indicates that data will be decrypted before being written to frame data
17 input register FDRI. A type 2 header follows, again with the op code 11, giving
18 the instruction that 10530 words are to be decrypted and written to data input
19 register FDRI. The 10530 encrypted data words then follow. Then the CRC word
20 follows for confirming that the (encrypted) data were loaded correctly. Finally,
21 the additional commands and data are sent, and place the PLD into operation
22 mode if all is correct.

23

24 Decryption Process

25 Fig. 6 shows how optional decryption is accomplished in one embodiment.
26 Fig. 6 shows the detail of configuration logic 29 and of buses 27 and 28 leading
27 into decryptor 24. Bus 27 includes the following:

- 28 •the 3-bit initial decryption key address "Init_key_addr" taken from
29 register address 1101 (Fig. 4d) in configuration logic 29,

- 1 •the 64-bit modified cipher block chaining value "modCBC". This value is
- 2 formed by replacing the lower order bits of the 64-bit CBC value
- 3 taken from register address 1100 (Fig. 4d) in configuration logic 29
- 4 with the 22-bit Frame Address value specified in Register 0001.
- 5 •the 64 lines "Encrypted_data" for loading encrypted data, taken from the
- 6 bitstream,
- 7 •the 64 lines "Decrypted_data" for returning the decrypted data produced
- 8 by decryptor 24 to configuration logic 29,
- 9 •a line for the signal "Enc_data_rdy" that tells decryptor 24 that data is on
- 10 the "Encrypted_data_ lines and that decryptor 24 can start
- 11 decrypting,
- 12 •a line for the signal "Dec_data_rdy" that tells configuration logic 29 that
- 13 decryption on a 64-bit word is complete and is available on the
- 14 "Decrypted_data" lines, and
- 15 •a Bad_key_set line used by decryptor 24 to cause configuration logic 29 to
- 16 abort the configuration and set a status register accordingly when
- 17 the keys have not been used as specified, for example, by the bits in
- 18 key memory that designate whether the keys are to be first, middle,
- 19 or last of a set. In the embodiment shown in Fig. 4d, the status
- 20 register is at address 0111, and the Bad_key_set error is indicated by
- 21 storing a logic 1 in one of the bits.
- 22 Bus 28 is comprised of the following:
- 23 •3 lines for the key address, which is initially the key address provided
- 24 from bus 27, but which is updated each time a new key is used,
- 25 •56 lines for the decryption key, and
- 26 •2 lines for indicating whether the decryption key is the first, middle, last,
- 27 or only key to be used.
- 28

1 Preventing Design Relocation

2 One potential attack on a design in an encrypted bitstream is to change the
3 frame address register (starting address) in the encrypted bitstream so that when
4 it is decrypted it is loaded into a portion of the FPGA visible when the FPGA is
5 being used. In some designs the content of the block RAM is visible. In all
6 designs the configuration of the input/output ports is visible and therefore the
7 configuration bits can be determined. Thus if successive portions of the design
8 were moved to visible portions of the FPGA, even though the FPGA did not
9 function properly, an attacker could in repeated relocation learn the contents of
10 the unencrypted bitstream.

11 To prevent design relocation, in one embodiment, an initial value used by
12 the cipher block chaining method used with the DES standard is modified. Figs.
13 7a and 7b show the encryption and decryption portions of a triple DES algorithm,
14 respectively, as modified according to the invention. The standard cipher block
15 chaining method starts the encryption process by XORing a starting number (can
16 be designer supplied or randomly generated) with the first word of data to be
17 encrypted. According to the invention, part of the random number is replaced by
18 address information, in the present example the 22-bit address of the first frame
19 into which data will be loaded in configuration memory 12. The starter CBC value,
20 a 64-bit number, has its least significant bits, labeled x, replaced by the frame
21 address, labeled y, to produce a modified 64-bit value that depends upon the
22 address into which data will be loaded. This modified CBC value is XORed with
23 the first word of configuration information Word1. Then the encryption
24 algorithm is used to produce the first encrypted word Encrypted Word1, which is
25 placed into the bitstream. Fig. 7a shows a triple encryption algorithm with outer
26 cipher block chaining, comprising an encryption step enc_1 using the first key,
27 followed by a decryption step dec_2 using the second key, followed by an
28 encryption step enc_3 using the third key. This first encrypted word Encrypted
29 Word1 is XORed with the second unencrypted word Word2 and the encryption

1 process is repeated to produce encrypted Word2. The XOR chaining continues
2 until all configuration data have been encrypted.

3 As shown in Fig. 7b, the PLD must perform the reverse process to derive the
4 decrypted words. For the above encryption sequence, the decryption sequence
5 would be decryption step dec_1 using key 3, then encryption step enc_2 using key 2,
6 then decryption step dec_3 using key 1. Importantly, part of the initial value for
7 generating Decrypted Word1 is to use the same frame address for both encryption
8 and decryption. The PLD, not the bitstream, generates the modified CBC value
9 from the frame address stored in the frame address register, which is also used to
10 specify the frame of configuration memory 12 into which configuration data are to
11 be loaded. So if an attacker changes the frame address into which the data are to
12 be loaded, the modified CBC value changes accordingly, and the configuration
13 data are not correctly decrypted.

14 The XOR step produces the original data that was in the designer's bitstream
15 before it was encrypted. Original Word1 = Decrypted Word1, for example. This
16 decrypted configuration data is sent on bus 27 (Fig. 3) to configuration logic 29.

18 Configuration Logic 29

19 Configuration logic 29 includes the structures to support optional encryption
20 as well as the structures to prevent design relocation and a single key attack. As
21 shown in Fig. 6, configuration logic 29 includes a holding register 292, control
22 logic 291, configuration registers (FDRI, FAR, CRC, and init CBC are shown),
23 decryptor 24 interface multiplexers 294 and 295, 64-bit assembly register 297, and
24 registers 298 and 299 (for interfacing with configuration access port 21). A 64-bit
25 shift register 299 receives data from configuration access port 21, which can be a
26 single pin for 1-bit wide data or 8 pins for 8-bit wide data. This data is loaded into
27 64-bit shift register 299 until register 299 is full. Then these 64 bits are preferably
28 shifted in parallel into 64-bit transfer register 298. From there, multiplexer 296b
29 alternately selects right and left 32-bit words, and multiplexer 296a moves the data
30 32 bits at a time either into holding register 292 or alternately into High and Low

1 portions of assembly register 297 as controlled by control line M. When loading of
2 the bitstream begins, line M and a clock signal not shown cause multiplexers 296a
3 and 296b to move data from 64-bit transfer register 298 to holding register 292.
4 From there these words are applied to control logic 291. If the word is a header,
5 control logic 291 interprets the word. If the op code indicates the data to follow
6 are to be written unencrypted, control logic 291 places an address on bus G to
7 select a register, places a signal on line L to cause multiplexer 294 to connect bus B
8 to bus D, and applies the following word on bus B. On the next clock signal (clock
9 signals are not shown), the data on bus D are loaded into the addressed register.
10 All registers shown in Fig. 4d can be loaded this way. The init CBC register for
11 loading the initial cipher block chaining value is a 64-bit register and receives two
12 consecutive 32-bit words, as shown in Fig. 5b and discussed above.

13 A modified CBC value formed from (1) the original CBC value stored in the
14 init CBC register and (2) the initial frame address stored in the FAR register is
15 available to decryptor 24. In one embodiment, the initial frame address in the
16 FAR register uses no more than 32 bits while the init CBC value uses 64 bits. In
17 the embodiment of Fig. 6, the 64-bit bus providing the modified CBC value
18 includes 22 bits from the frame address register FAR and 42 bits from the init CBC
19 register. Important to the security provided by the present invention, note that
20 this value depends upon where configuration data will be loaded. If an attacker
21 were to try to load encrypted data into a different place by changing the contents
22 of the FAR register, the modCBC value fed to decryptor 24 would also change.

23 When the op code command to decrypt a number of words of configuration
24 data is received by control logic 291, the decryption process begins. Control line
25 M causes multiplexer 296a to apply data from transfer register 298 to bus A
26 leading to assembly register 297. Control bus H alternately connects bus A to the
27 High[31:0] and Low[31:0] portions of encrypted data register 297 to form a 64-bit
28 word to be decrypted. Control logic 291 then asserts the Enc_data_rdy signal,
29 which causes decryptor 24 to decrypt the data in register 297.

1 To perform the decryption, decryptor 24 applies a key address KeyAddr on
2 bus 28 to key memory 23 (Fig. 3). This causes key memory 23 to return the 56-bit
3 key in that address on the 56-bit Key lines. It also causes key memory 23 to return
4 two additional bits "Order" also stored in the key data at that address. For the
5 first decryption key, these two bits must indicate that this is a first key or an only
6 key. If not, decryptor 24 asserts the Bad_key_set signal, which causes control logic
7 29 to abort the configuration operation. If these two bits indicate the key is a first
8 or only key, decryptor 24 performs the decryption, using for example the well
9 known DES algorithm (described by Schneier, *ibid*). If the key isn't an only key,
10 decryptor 24 then gets the key at the next address in key memory 23, and checks
11 to see if the two Order bits indicate it is a middle or last key. If not, the
12 Bad_key_set signal is asserted and the configuration is aborted. If so, decryption
13 is performed. If it is a middle key, another round of decryption is done. If it is the
14 last key, decryptor 24 forms the XOR function of the decrypted word and the
15 value modCBC. Decryptor 24 then places the resultant value on the 64-bit
16 Decrypted_data bus and asserts the Dec_data_rdy signal. This causes control logic
17 291 to place signals on control line K to cause multiplexer 295 to break the 64-bit
18 word into two sequential 32-bit words. Control logic 291 places a signal on line L
19 to cause multiplexer 294 to forward the 32-bit words of decrypted data to bus D.
20 Control logic 291 also places address signals on bus G to address frame data input
21 register FDRI. The next clock signal moves the decrypted data to bus E where it is
22 loaded into the frame register and when the frame register is full, eventually
23 shifted into configuration memory 12 at the address indicated in the FAR register.

24 The modCBC value is used only once in the decryption operation.
25 Subsequent 64-bit words of encrypted data are decrypted and then chained using
26 the previously decrypted data for the XOR operation. (The value stored in the
27 FAR register is also used only once to select a frame address. Subsequently, the
28 frame address is simply incremented every time a frame is filled.)
29

1 Flow of Operations

2 Fig. 8 indicates the flow of operations performed by configuration logic 29
3 and decryptor 24. Configuration logic 29 begins at step 70 by loading the bitstream
4 headers and placing the corresponding data into configuration logic registers
5 shown in Fig. 4b, including determining bitstream length. At step 71, as a further
6 part of the start-up sequence, configuration logic 29 reads the first configuration
7 memory address. Recall that the bitstream format includes an op code that
8 indicates whether encryption is being used. Step 72 branches on the op code
9 value. If encryption is not used, the process is shown on the left portion of Fig. 8.
10 If encryption is used, the process is shown in the right of Fig. 8. For no encryption,
11 at step 73, configuration logic 29 sets a counter equal to the bitstream word count
12 (see Fig. 4c). At step 74, 32 bits (1 word) of configuration data are sent to the
13 addressed frame of configuration memory 12. If step 75 indicates the counter is
14 not finished, then at step 76 the counter is decremented and the next 1 word of
15 configuration data are sent to configuration memory 12. When the counter has
16 finished, configuration logic 29 performs cleanup activities including reading the
17 final cyclic redundancy value to compare with a value at the end of the bitstream
18 to determine whether there were any errors in loading the bitstream.

19 If step 72 indicates the bitstream is encrypted, the counter is loaded with the
20 word count, and at step 81 the process loads the initial key address from key
21 address register 293 (Fig. 6) into decryptor 24.

22 At step 82, two words (64 bits) of encrypted configuration data are loaded
23 into decryptor 24. At step 83 the addressed key is loaded into decryptor 24. In
24 one embodiment, a 64-bit number is loaded into decryptor 24. This 64-bit number
25 includes a 56-bit key, two bits that indicate whether it is the first, middle, last, or
26 only key, and some other bits that may be unused, used for parity, or used for
27 another purpose. In another embodiment, the 64-bit key data includes a single bit
28 that indicates whether it is or is not the last key. In yet another embodiment, the
29 64-bit key data includes an address for the next key so the keys don't need to be
30 used in sequential order. In another embodiment, extra bits are not present and

1 the key data uses less than 64 bits. In yet another embodiment, the bitstream
2 rather than the key indicates how many keys are to be used, but this is believed to
3 be less secure because an attacker can see how many keys are used and perform a
4 single key attack, breaking one key at a time, whereas using the keys to indicate
5 how many keys are to be used does not give this information to an attacker.

6 At step 84, decryptor 24 decrypts the 64-bit data with the 56-bit key using,
7 for example, the DES algorithm. The DES algorithm is described in the above-
8 mentioned book by Bruce Schneier at pages 265 to 278. Other encryption
9 algorithms may also be used, for example, the advanced encryption standard AES.
10 Other algorithms may require more key bits. For example AES requires a key of
11 128 to 256 bits.

12 Step 85 determines whether more keys are to be used. The two bits that
13 indicate whether the key is first, middle, last, or only key are examined to
14 determine whether this is the last key, and if not, the key address is incremented
15 and decryptor 24 addresses the next key in memory 23.

16 After the last key has been used, at step 87, the modified CBC value shown in
17 Fig. 6 as a 64-bit value from combining registers FAR and init CBC is XORed with
18 the decrypted value obtained in step 87. In one embodiment, 22 bits of the 64-bit
19 random number loaded into the CBC register are replaced with the frame address
20 of the beginning of the bitstream. The goal of the encryption process is to have
21 every digit of the 64-bit encrypted value be a function of all previous bits plus the
22 key. The goal of combining the CBC value with the first address is to cause the
23 decrypted values to change if the bitstream is loaded into a different address from
24 the intended starting address. Step 87 achieves both goals. The new CBC value is
25 then stored. Storage may be in the FAR and init CBC registers shown in Fig. 6, or
26 in another register located in decryptor 24.

27 At step 88, this decrypted configuration data is sent on bus 27 (Fig. 3) to
28 configuration logic 29. Configuration logic 29 calculates an updated cyclic
29 redundancy check value to be compared with the cyclic redundancy value stored
30 in the CRC register at the end of the loading process. If configuration logic 29 has

1 been set to use encryption, a multiplexer in configuration logic 29 forwards this
2 decrypted configuration data to the addressed column of configuration memory
3 12.

4 At step 89 the counter is checked and if not finished, at step 96 the counter is
5 decremented and the process returns to step 82 where the next 64 bits (2 words)
6 are loaded from the bitstream.

7 Finally, when step 89 indicates the counter is finished, at step 90, a CRC
8 (cyclic redundancy check) value in the bitstream is compared with a CRC value
9 calculated as the bitstream is loaded. If the values agree, configuration is complete
10 and the FPGA goes into operation. If the values do not agree, a loading error has
11 occurred and the entire configuration process is aborted.

12 13 Evaluating Key Order - Preventing Single Key Attack

14 Fig. 9 shows a state machine implemented by decryptor 24 to evaluate key
15 order. The state machine remains in state S1 until the Enc_data_ready signal is
16 activated. This signal indicates decryption can begin and moves to decision state
17 Q1 where decryptor 24 applies the address specified by the address Init_key_addr
18 on bus 27 to bus 28, reads back a key and a key order, and from the two bits of key
19 order data determines whether the key is a first or only key. If not, decryptor 24
20 sends the Bad_key_set signal to control logic 291 and causes configuration logic 29
21 to abort the configuration. If the address is first or only, decryptor 24 goes to state
22 S3, which decrypts the data. Then the state machine goes to decision state Q2,
23 which determines whether the key is last or only. If so, decryption is complete
24 and at state S4 decryptor 24 returns the decrypted data to configuration logic 29.
25 If not, in state S5, decryptor 24 increments the key address, and gets the new key.
26 The state machine asks question Q3 to determine whether the next key is a middle
27 or last key. If not, state S2 causes the configuration to abort. If the key is middle
28 or last, the state machine returns to state S3 to decrypt the data again. In another
29 embodiment, in state S4 decryptor 24 also performs the step of XORing the
30 decrypted data with a CBC value.

1 The benefit of storing the key order within the keys is that an attacker can
2 not implement a single key attack because the attacker can not prevent decryptor
3 24 from using all the keys specified by key memory 23 (as intended by the
4 designer) when performing decryption. It is not necessary to ask the second and
5 third questions Q2 and Q3 to protect against an attacker using a single key attack,
6 since the key order is stored within the key data inside the PLD. However, it is
7 beneficial to the designer or board tester who loads the keys to ask all three
8 questions to make sure that each key has been labeled correctly when it is loaded.

9 In one embodiment, decryptor 24 uses the triple DES standard with a
10 decryption-encryption-decryption sequence, alternating the algorithm (only
11 slightly) each time another key is used. Such a combination is in accordance with
12 the ANSI X9.52 1998 Triple DES standard. In another embodiment, decryption is
13 used each time.

14

15 Key Memory 23

16 The circuit shown in Fig. 10a includes three components: battery supply
17 switch 22, control logic 23a and key registers 23b. Control logic circuit 23a and
18 key registers 23b comprise key memory 23 of Fig. 3. In the embodiment of Fig.
19 10a, key registers 23b comprise six 64-bit words. Of course, other key memory
20 sizes may alternatively be used. In other embodiments, there may be far more
21 than six keys stored in key memory 23, and more than 3 bits needed to give the
22 address of the key to be used. The power supply for key registers 23b comes from
23 battery supply switch 22 on line VSWITCH. When key memory supply voltage
24 VCCI is insufficient or not present, battery supply switch 22 applies the battery
25 backup voltage VBATT to the VSWITCH line so that VSWITCH carries a positive
26 voltage.

27 In this embodiment each key register has 64 memory cells. Each cell receives
28 a write enable signal WE, that when high causes data to be written to the cell and
29 when low causes data in the cell to be held. Cells in one register have a common
30 write enable signal WE. When the PLD supply voltage (different from VCCI) is

1 absent such that the WE signals are not actively driven, weak pull-down
2 transistors such as T1 pull down the WE signal so that none of the key memory
3 registers can be addressed, and none of the memory cells are disturbed.

4 In one embodiment, the JTAG port of a PLD is used to load decryption keys
5 into the PLD. The memory cell supply voltage is at the device voltage level of
6 VCCI during normal operation, and in one embodiment this level is between 3.0
7 and 3.6 volts. Signals applied to the JTAG port may be several different voltages.
8 Also, there may be several different internal voltages. Thus voltage translation is
9 needed. This voltage translation is performed in the memory cells. Detail of a
10 memory cell is shown in Fig. 10b. The latch comprising inverters I1 and I2 is
11 powered by VSWITCH and is thus powered whether or not a device supply
12 voltage VCCI is present. The WE signal and the inverted data signal data_b both
13 operate at the 1.5 volt level. These signals drive NMOS transistors T4, T5, and T6,
14 and through inverter I3 (also using the 1.5 volt supply voltage) transistor T7. Fig.
15 10b shows that when WE is low, transistors T4 and T5 are off, and the content of
16 the latch comprising inverters I1 and I2 is retained. When WE is high, one of
17 inverters I1 and I2 is pulled low, thus loading the new data into the latch.

18 Control logic circuit 23a receives signals from JTAG bus 25 (also shown in
19 Fig. 3). JTAG bus 25 includes control signals for writing, reading, setting the
20 secure mode, and data and address buses. This interface conforms to the IEEE
21 1532 JTAG standard. Before key memory 23 can be accessed through JTAG bus
22 25, the security status (bus 26) is placed in non-secure mode, which can be done
23 using the ISC_PROGRAM_SECURITY instruction (see Fig. 10a) and applying
24 logic 1 to bit 0 of the key data bus. Key memory 23 is written to and read (for
25 verification) from JTAG bus 25 using the ISC_PROGRAM and ISC_READ
26 instructions of the IEEE 1532 standard. Control logic 23a includes a decoder for
27 decoding the 3-bit address signal ADDR from JTAG bus 25 to produce a low-
28 going pulse on the addressed one of write strobe lines ws_b[5:0] if the
29 ISC_PROGRAM instruction appears on JTAG bus 25, or a high signal on the
30 addressed one of read select lines rsel[5:0] if the ISC_READ instruction appears

1 on JTAG bus 25. One of the six 64-bit words can be read by applying a high
2 signal to one of the six read select lines rsel[5:0], which causes read multiplexer
3 23d to place the selected word on the 64 output lines q[63:0]. Only one of the write
4 select lines or read select lines is selected at one time. When no read select signal
5 is asserted, a high park_low signal causes 64 transistors 23e to pull down the 64
6 lines q[63:0] and prevent these lines from floating.

7 If key memory 23 is operating in non-secure mode, the 64-bit words can be
8 read from key registers 23b to JTAG bus 25 where the values can be examined
9 external to the FPGA. The FPGA can be tested in this non-secure mode by using
10 56 bits of a selected 64-bit word in registers 23b as the 56-bit key for DES
11 decryption. In one embodiment, when key memory 23 is in non-secure mode,
12 readback of a user's design is possible even though the design has been encrypted
13 before loading. This allows the designer to test and debug even an encrypted
14 design. Communication of the key security status is through bus 26 (see also
15 Fig. 3).

16 After values have been written into key registers 23b and verified with a
17 read operation from bus 25, control logic 23a is placed into secure mode by using
18 the ISC_PROGRAM_SECURITY instruction and applying logic 0 to bit 0 of the 64-
19 bit key data bus which is part of the IEEE 1532 standard. In the secure mode, no
20 access to the keys is granted.

21 As shown in Fig. 11, to assure that an attacker can not return to the non-
22 secure mode by using the ISC_PROGRAM_SECURITY instruction and then
23 reading out the keys, if the security is eliminated (if the
24 ISC_PROGRAM_SECURITY signal moves to the non-secure logic level), a state
25 machine in control logic 23a erases all keys by writing zeros to all six words, one
26 word at a time. This is done by: in step 110 putting zeros on the wdata[63:0] bus
27 and at step 111 asserting the ws_b[0] signal (with a logic 0 value), then at steps
28 112-117 successively strobing the ws_b[0:0] through ws_b[5:0] signals one at a
29 time before changing the security status at step 118 and entering the non-secure
30 mode, and finally at step 119 releasing the wdata[63:0] logic 0 values. Thus, any

1 attempt to place battery backed up memory 23 into a non-secure mode causes all
2 values in key registers 23b to be erased.

3 To communicate whether key memory 23 is in secure mode, control logic 23a
4 sends a secure mode signal on bus 26 (may be a single line) to configuration logic
5 29 to indicate that key memory 23 is operating in secure mode. If this signal
6 switches to non-secure mode, configuration logic 29 clears the design from
7 configuration memory 12. Note that an unencrypted bitstream may be loaded by
8 configuration logic 29 into configuration memory 12 even though keys are stored
9 in key registers 23b and key memory 23 is in a secure mode.

10

11 Loading the Keys, Multiple Encryption Keys

12 Decryption keys must be loaded into the PLD before the PLD is put into a
13 secure mode where a user can not learn details of the design. In the embodiment
14 shown in Fig. 3, the key or keys are loaded through a JTAG port 20.

15 As a feature of the invention, the encryption keys are loaded through this
16 JTAG port 20. It is expected that JTAG programmers will load the encryption keys
17 during board testing. When the RAM for storing keys is in a non-secure mode, the
18 user has full access to it and can read out both the keys and the design, even if the
19 design has been encrypted. This is useful for the designer while testing the keys
20 and the use of the keys. Then once the designer is satisfied with the operation, he
21 or she can send another instruction through the JTAG port and place the key
22 memory into a secure mode. Once the key memory has been placed into secure
23 mode, the keys can not be read out. Further, moving the key memory from
24 secure to non-secure mode erases the keys by activating a circuit that starts up the
25 memory initialization process. (Fig. 15, discussed below, shows a state machine
26 for performing this function.)

27 According to one aspect of the invention, more than one key may be used to
28 encrypt the design. For example, if three keys are to be used, the bitstream is first
29 encrypted using the first key, then the resulting encrypted bitstream is again
30 encrypted using the second key, then finally the resulting doubly encrypted

1 bitstream is again encrypted using the third key. This triply encrypted bitstream
2 is stored, for example in a PROM or flash memory on the printed circuit board
3 that holds the PLD.

4 For decryption, these keys are used in succession (reverse order) to
5 repeatedly decrypt the encrypted bitstream. Further to this, if more keys are
6 stored in the PLD than are used for decrypting a particular design, the encrypted
7 bitstream may include in an unencrypted portion an indication of how many keys
8 are to be used, and the address of the first key. Such an embodiment may make it
9 easier for an attacker to decrypt the bitstream because the attacker need only deal
10 with one key at a time. Alternatively, the keys themselves may indicate whether
11 they are the first, middle, last, or only keys. Thus the same PLD can at different
12 times be programmed to perform different functions (configured with different
13 designs), and information about the values of the different keys can be made
14 available to only one or some of the designers. Thus a first designer may not learn
15 about a second design even though both designs are implemented in the same
16 PLD (at different times).

17 Regarding Fig. 3, configuration logic 29 includes additional logic beyond
18 configuration logic 14 of Fig. 1. As in the structure of Fig. 1, the bitstream on
19 configuration access port 21 is treated as words, in one embodiment 32-bit words.
20 Several of the words, usually at or near the beginning of the bitstream, contain
21 header information, for example length of the bitstream, starting address for the
22 configuration data. New to the bitstream of the present invention is an indication
23 as to whether the bitstream is encrypted, and the address of a key for decrypting
24 configuration data in the bitstream.

25 26 Battery Backed up Memory

27 Values stored in key memory 23 are preferably retained by a battery when
28 power to the FPGA is removed.

29 Further, other memories than encryption keys can also be backed up using a
30 battery supply switch such as switch 22. In particular, a PLD can be

1 manufactured in which the VSWITCH voltage supply is routed to all flip flops in
2 the PLD if the purpose is to preserve data generated by the PLD when the PLD is
3 powered down. And if the purpose is to also preserve configuration of the PLD
4 when the PLD is powered down, configuration memory 12 (Fig. 3) may
5 alternatively be powered from VSWITCH, though such an embodiment requires
6 considerably more battery power than does powering just the flip flops in the
7 PLD, and powering flip flops in turn requires more battery power than does
8 powering a very small memory for storing a few encryption keys.

9 Fig. 12 shows a structure for battery supply switch 22. In this embodiment,
10 VBATT level shift circuit 31 allows the PLD to use different voltages for the
11 battery and main power supply. And of course the purpose of the circuit is to deal
12 with varying voltage levels. In one embodiment, battery supply switch 22 can
13 handle VCCI voltages up to 3.6 volts, and switches to battery power when VCCI
14 falls below about 1 volt. Battery voltage can be between 1.0 volts and 3.6 volts.

15 Battery supply switch 22 includes four output driving P-channel transistors
16 P0 through P3. Transistors P0 and P1 turn on and off together as do transistors P2
17 and P3. The circuit includes two transistors for each leg instead of one in order to
18 avoid any possibility that VCCI and VBATT will be connected together.
19 Transistor P0 includes a parasitic diode (the p-n junction between the drain and
20 substrate) that can conduct current upward in the figure even when the transistor
21 is off. To prevent such current flow, transistor P1 is added and has its substrate
22 connected to its drain so that parasitic diode conduction can only be downward.
23 A similar arrangement is made with transistors P2 and P3. Thus there is no
24 possibility that current will conduct from VBATT to VCCI or from VCCI to
25 VBATT. Inverters 33 and 34 are powered from the VSWITCH voltage, so they are
26 always operational even when VCCI is off. Transistor P4 is a resistor, always on,
27 and provides protection against electrostatic discharge. Most of the time, the
28 structures controlled through transistor P4 do not draw current, so there is usually
29 no voltage drop across transistor P4.

1 Fig. 13 shows one embodiment of VBATT level shift circuit 31. Output
2 voltage at terminal OUT is controlled by signals IN and INB. These signals are
3 generated by inverters 33 and 34, which derive their supply voltage from the
4 VSWITCH node. Therefore, if VSWITCH is supplied by VBATT, one of signals IN
5 and INB will be at voltage VBATT and the other will be at ground. However, if
6 VSWITCH is supplied by VCCI, one of IN and INB will be at the VCCI voltage
7 level. If IN is at VCCI and INB is at ground, transistor 45 will be on and transistor
8 46 will be off. The gate of P-channel transistor 43 will be low, and transistor 43
9 will be on, pulling the input of inverter 47 to VBATT. The output of transistor 48
10 will also be at VBATT. Returning to Fig. 12, a voltage level VBATT at the gate of
11 transistor P0 will positively turn off transistor P0.

12 Fig. 14 shows VCCI detect circuit 32. VCCI detect circuit 32 determines
13 when the voltage on line VSWITCH will be switched to the battery and back to
14 VCCI. This embodiment of circuit 32 is essentially a string of five inverter stages
15 I1 through I5. Controlling of the switching voltage occurs primarily at inverter
16 stage I1. Transistors 52 and 53 form a CMOS inverter. Power to this CMOS
17 inverter must flow through P-channel transistor 51, which doesn't turn on until
18 VCCI reaches the threshold voltage of transistor 51, typically 0.7-0.8 volts. If VCCI
19 is switching slowly, taking several milliseconds to reach full voltage, transistor 51
20 delays the activation of circuit I1. When transistor 51 turns on, the source (upper
21 terminal) of transistor 52 goes to VCCI. N-channel transistor 53 typically has a
22 threshold voltage of about 0.7-0.8 volts as well but is sized as a weak transistor
23 relative to transistor 52. In one embodiment, transistor 53 has a width/length
24 ratio of 1/18 whereas transistor 52 has a width/length ratio of 3/2. So transistor
25 53 pulls the input of inverter I2 low only until transistor 52 turns on. In one
26 embodiment, circuit I1 pulls the input of inverter stage I2 high when VCCI is at
27 about 1.0 volt. Thus the output of inverter 54 goes low. Inverter stage I3 is a
28 Schmitt trigger. The zero volt input to inverter stage I3 turns off transistors 56 and
29 57 and turns on transistor 55, pulling node N3 to VCCI and turning on transistor
30 58, which pulls up node N4, thus raising the voltage at which transistor 56 will

1 turn on, and preventing small variations in VCCI from switching the voltage at
2 node N3. Inverters 59 and 60 are optional and produce a sharper edge of the
3 output signals usebatt and usebattb that cause battery supply switch 22 of Fig. 12
4 to switch from VBATT to VCCI. Transistor 61, controlled by the VBATT' signal, is
5 a weak pull-down transistor and assures that the usebattb line is pulled low when
6 VCCI is not present and therefore not providing an output signal from inverter 60.

7
8 Key Not Available to Purchaser of a Product Containing the Configured PLD

9 In order to prevent an attacker from learning the design that has been used
10 to configure the PLD, several additional steps may be taken.

11 According to another aspect, a key is loaded into the PLD before sale of a
12 system incorporating the PLD, such that after sale of a system including the PLD,
13 the design can be loaded into the PLD and used, but an attacker can not learn the
14 value stored in the key (or keys). Thus the unencrypted design can not be read or
15 copied. To achieve this security, several steps are taken.

16
17 Secure Mode Preservation (Tamper-proofing)

18 In one embodiment, there are two security flags in configuration logic 29 of
19 the PLD. One indicates whether the decryption keys are secured, and the other
20 indicates whether the design is a decrypted design and must be protected. If
21 JTAG logic 13 (Fig. 3) selects secure mode with the ISC_PROGRAM_SECURITY
22 instruction, a secure_key flag in control logic 23a (Fig. 10a) is set. If the bitstream
23 loaded into the PLD has the indication that design data in the bitstream is
24 encrypted, a secure_design flag in configuration logic 29 (not shown) is set. If
25 either flag is later unset, the entire configuration memory is cleared, thereby
26 removing the decrypted design. If the secure_key flag is reset (by an
27 ISC_PROGRAM_SECURITY instruction), then the keys are also erased.

28 Fig. 15 shows a state machine for performing the design clearing function.
29 When the secure_design flag is set, the state machine enters state S1. This state
30 monitors a change from secure to non-secure mode of the secure_design flag. As

1 long as the secure-design mode continues, the state machine stays in state S1.
2 Once a change occurs, the state machine enters state S2 and the data shift registers
3 for shifting data into configuration memory 12 are reset, thereby placing zeroes on
4 all data lines for the configuration memory bits. Next, the state machine moves to
5 state S3 where the word line of the addressed frame is asserted. This results in the
6 zeros on the data shift register lines being written into the memory bits at the
7 addressed frame. If question Q1 indicates there are more frames to be addressed,
8 the state machine moves to state S4 where the frame address is advanced and the
9 state machine returns to state S3. When question Q1 indicates there are no more
10 frames to be addressed, the process is done and the configuration memory is
11 cleared.

12 It is also necessary to protect the keys from being accessed by an attacker.
13 Loading of the keys is performed before a system containing the design is made
14 available to an end customer. When designers are in the process of developing the
15 design, they may wish to operate the PLD in a non-secure mode for debugging. In
16 order to allow for this debugging operation and also to preserve security of the
17 keys, the key loading process begins in a non-secure mode by clearing all key
18 registers. A secure key flag must be kept in the non-secure mode while keys are
19 loaded and while the keys are read back for verification. The secure key flag may
20 also be kept in the non-secure mode while a configuration bitstream is loaded and
21 decrypted. But once the secure key flag is set, returning the secure key flag to the
22 non-secure mode clears all keys and also initiates operation of the state machine of
23 Fig. 15. So, not only are the keys cleared, but the configuration is also cleared.

24 25 Readback Attack and Readback Disabled

26 Some FPGAs allow a bitstream to be read back out of the FPGA so that a
27 user may debug a design or may obtain state machine information from flip flops
28 in the FPGA. Unless the design were re-encrypted for the read-back operation, the
29 act of reading back the bitstream would expose the unencrypted bitstream to
30 view.

1 Further security of the design is provided by disabling readback when an
2 encrypted design is loaded into the FPGA. In one embodiment, readback is
3 disabled only if the decryption keys are also secured.

4 Fig. 16 shows the block diagram of a structure for loading and reading back
5 configuration memory. In one embodiment, configuration logic 29 prevents
6 readback when two conditions are present: (1) the security status line on data bus
7 26 (see Figs. 3 and 10) indicates that the keys are in a secure mode, and (2)
8 configuration logic 29 has responded to op codes in a configuration bitstream that
9 indicate the bitstream is encrypted. So if either the keys are not secured or the
10 bitstream is not encrypted, readback can be enabled. In other embodiments,
11 different conditions control whether readback can be enabled.

12 When configuration logic 29 receives in the bitstream a header indicating
13 that readback is to be performed, it sends on line 107 the frame address stored in
14 its frame address register, which is decoded by address decoder 110 to select the
15 addressed line of bus 109. Next, word line enable signal on line 108 is asserted,
16 which asserts the selected word line of bus 109 to allow memory cells addressed
17 by the selected word line to place their values on the n data lines 102 (n is the
18 frame length and is stored in configuration logic 29). Configuration logic 29 then
19 asserts the Load signal on line 104 to load the frame of data (in parallel) into data
20 shift register 101. Next, configuration logic 29 asserts the shift signal on line 105 to
21 cause data shift register 101 to shift out the frame of data in 32-bit words on bus
22 103 to the frame data output register (see Fig. 4d) and from there to an outgoing
23 bitstream on configuration access port 21 (Fig. 3).

24 If decryption is indicated in the bitstream, configuration logic 29 sets internal
25 flags to indicate this. If these flags are set and key memory 23 is in secure mode as
26 indicated by the security status signal on bus 26, then configuration logic 29
27 responds to a readback command in the bitstream by keeping the word line
28 enable signal on line 108 inactive and by keeping the load and shift signals on lines
29 104 and 105 inactive to prevent readback. However, if key memory 23 is not in

secure mode, even though the design may be encrypted, readback is allowed so that testing and debugging are possible.

Partial Reconfiguration Attack and Prevention

Some FPGAs allow partial reconfiguration of the FPGA or allow different parts of a design to be loaded into different parts of the FPGA using separate starting addresses and separate write instructions. An attacker might attempt to learn the design by partially reconfiguring the design to read contents of a block RAM or flip flops directly to output ports or by adding a section to an existing design to read out information that can be used to learn the design. For example, the attacker might partially reconfigure the PLD with an unencrypted design whose only purpose is to extract information about the encrypted design. Such a Trojan Horse design could be loaded into the PLD with another bitstream or attached to an existing encrypted bitstream. If the attacker was interested in learning a state machine design loaded into block RAM of an FPGA, for example, the Trojan Horse design could include logic to cycle through the addresses of the block RAM and send the block RAM data contents to package pins.

In order to prevent an attacker from making such changes, if the original design is encrypted, configuration logic 29 disallows partial reconfiguration once configuration with decryption is started. Configuration logic 29 disallows a further write instruction once a header with the decryption op code has been processed. Also, configuration logic 29 disallows configuration with decryption once configuration without encryption has been done. Configuration logic 29 accomplishes these restrictions by ignoring headers that write to configuration memory after a decrypt instruction has been received and ignoring headers that have a decrypt command if an unencrypted portion of a design has been loaded. Thus, if any op code indicates that writing with decryption is being used, the PLD will accept only a single write instruction.

Additional Embodiments

1 The above description of the drawings gives detail on a few embodiments.
2 However, many additional embodiments are also possible. For example, instead
3 of the cipher block chaining algorithm discussed above, one can use an encryption
4 method called cipher feedback mode in which data can be encrypted in units
5 smaller than the block size, for example one 8-bit byte at a time. This cipher-
6 feedback mode is described by Schneier, *ibid*, at pages 200-203.

7 In yet another embodiment, if encryption is used, all bitstreams must be
8 loaded starting at address 0. One implementation of this embodiment replaces
9 any address loaded into the starting frame address register FAR (Fig. 6) with
10 address 0 when an op code specifying encryption is received.

11 In still another embodiment, the starting address and the design data are
12 both encrypted. In this embodiment, it is possible to load several segments of
13 encrypted design data starting at different frame addresses, just as is possible with
14 unencrypted design data.

15 In another embodiment, the key data stored in a key memory such as key
16 memory 23 specifies the number of keys that will follow. In a variation on this
17 embodiment, the key data also specify the number of keys that precede the key. If
18 an attacker gives a key address other than the first key address intended by the
19 designer, the configuration may be aborted. Additionally, encryption will proceed
20 until the number of keys specified within the keys have been used.

21 In another embodiment, instead of allowing keys to be read back when the
22 key memory is in a non-secure mode, the keys include parity bits or CRC check
23 bits, and only these bits can be read back for verification that the key or keys were
24 loaded correctly. This embodiment allows keys known to one designer to be kept
25 secret from another designer, and is useful when the PLD is to be used at different
26 times for loading different designs.

27 Regarding the CRC checksum calculation discussed above, embodiments can
28 be provided in which the CRC checksum is calculated either before or after a
29 design is encrypted. Of course, if the checksum added to the bitstream is
30 calculated before the design data is encrypted, then a corresponding checksum

1 must be calculated within the PLD on the design data after it has been decrypted.
2 Likewise, if the checksum added to the bitstream is calculated after the design
3 data has been encrypted, then the PLD must calculate the corresponding
4 checksum on the received bitstream before the design data have been decrypted.

5 A further note regarding the process of loading the decryption keys, when
6 the process illustrated in Fig. 8 is used, it is not necessary to use a device
7 programmer for loading decryption keys. The keys may simply be loaded as part
8 of the board test procedure.

9 It is also possible to use the structures and methods described above for
10 programming more than one PLD. It is well known to use a single bitstream for
11 programming more than one PLD or FPGA, either by arranging several devices in
12 a daisy chain and passing the bitstream through the devices in series or
13 addressing the devices in series. It is possible to arrange several PLDs in such an
14 arrangement when one or more of the devices is to receive encrypted design data.

15 As yet another embodiment, although one embodiment was described in
16 which only a single address could be specified for a bitstream having encrypted
17 design data, in another embodiment, several addresses, preferably encrypted, can
18 be specified for loading separate portions of a design. Further, these separate
19 portions may use the same encryption key or keys, or the separate portions may
20 use different encryption keys or different sets of keys.

21 Variations that have become obvious from the above description are
22 intended to be included in the scope of the invention.

CLAIMS

1. A bitstream for configuring a PLD with an encrypted design comprising:
a plurality of unencrypted words for controlling loading of configuration data; and
a plurality of encrypted words specifying the encrypted design.
2. The bitstream of Claim 1 wherein one of the unencrypted words comprises a key address for locating a decryption key for decrypting the encrypted words
3. The bitstream of Claim 1 wherein one of the unencrypted words comprises an address register for loading the first word of the encrypted design.
4. The bitstream of Claim 1 further comprising a plurality of encrypted words for controlling loading of configuration data, wherein one of the encrypted words for controlling loading of configuration data specifies an address for loading a word of the encrypted design.
5. The bitstream of Claim 4 wherein another of the encrypted words for controlling loading of configuration data specifies an address for loading a word of the encrypted design.
6. The bitstream of Claim 1 wherein the unencrypted words for controlling loading of configuration data include a cyclic redundancy checksum for comparison to a cyclic redundancy checksum calculated by the PLD.
7. The bitstream of Claim 6 wherein the cyclic redundancy checksum in the bitstream is calculated on configuration data before the configuration data has been encrypted.

1 8. The bitstream of Claim 6 wherein the cyclic redundancy checksum in the
2 bitstream is calculated on configuration data after the configuration data has been
3 encrypted.

4
5 9. A bitstream for configuring a plurality of PLDs comprising:
6 a first plurality of words for controlling loading of configuration data into a
7 first PLD; and
8 a first plurality of words specifying a design for loading into the first PLD
9 a second plurality of words for controlling loading of configuration data into
10 a second PLD; and
11 a second plurality of words specifying a design for loading into the second
12 PLD;
13 wherein at least one of the first and second pluralities of words specifying a
14 design is encrypted.

15 .
16 10. The bitstream of Claim 9 wherein the first plurality of words specifying a
17 design for loading into the first PLD is unencrypted and the second plurality of
18 words specifying a design for loading into the second PLD is encrypted.

19
20 11. The bitstream of Claim 9 wherein the first plurality of words specifying a
21 design for loading into the first PLD is encrypted and the second plurality of
22 words specifying a design for loading into the second PLD is unencrypted.

23
24 12. The bitstream of Claim 9 wherein both of the first and second pluralities of
25 words specifying a design are encrypted.

26
27 13. The bitstream of Claim 12 wherein the first plurality of words specifying a
28 design for loading into the first PLD are encrypted with a first key and the second
29 plurality of words specifying a design for loading into the second PLD are
30 encrypted with a second key.

1

2 14. The bitstream of Claim 1 wherein the plurality of encrypted words further
3 specify an address into which the encrypted design is to be loaded.

4

5 15. The bitstream of Claim 1 wherein the plurality of unencrypted words for
6 controlling loading of configuration data include a cipher block chaining initial
7 value.

8

9 16. The bitstream of Claim 1 wherein the plurality of encrypted words specifying
10 the encrypted design are loaded into a single group of successive addresses.

11

12 17. The bitstream of Claim 1 wherein the plurality of encrypted words specifying
13 the encrypted design are loaded into a plurality of groups of successive addresses.

14

15 18 A method of generating a bitstream with encrypted design data comprising the
16 steps of:

17 forming a cipher block chaining initial value comprising a starting address
18 for loading a design into a PLD;

19 combining the cipher block chaining initial value with a first word of design
20 data to form a first combined word;

21 encrypting the first combined word to form a first word of encrypted data;

22 combining the first word of encrypted data with a second word of design
23 data to form a second combined word; and

24 encrypting the second combined word to form a second word of encrypted
25 data.

26


27 19. The method of Claim 18 wherein subsequent steps of combining and
28 encrypting are repeated until all design data has been encrypted.

[illegible]

1 BITSTREAM FOR CONFIGURING A PLD
2 WITH ENCRYPTED DESIGN DATA

3
4 Stephen M. Trimberger
5 Raymond C. Pang
6 Walter N. Sze
7 Jennifer Wong
8 Kameswara K. Rao
9

10 It is sometimes desirable to protect a design used in a PLD from being
11 copied. If the design is stored in a different device from the PLD and read into the
12 PLD through a bitstream, an unencrypted bitstream could be observed and copied
13 as it is being loaded. According to the invention, a bitstream for configuring a
14 PLD with an encrypted design includes unencrypted words for controlling
15 loading of the configuration bitstream and encrypted words that actually specify
16 the design.

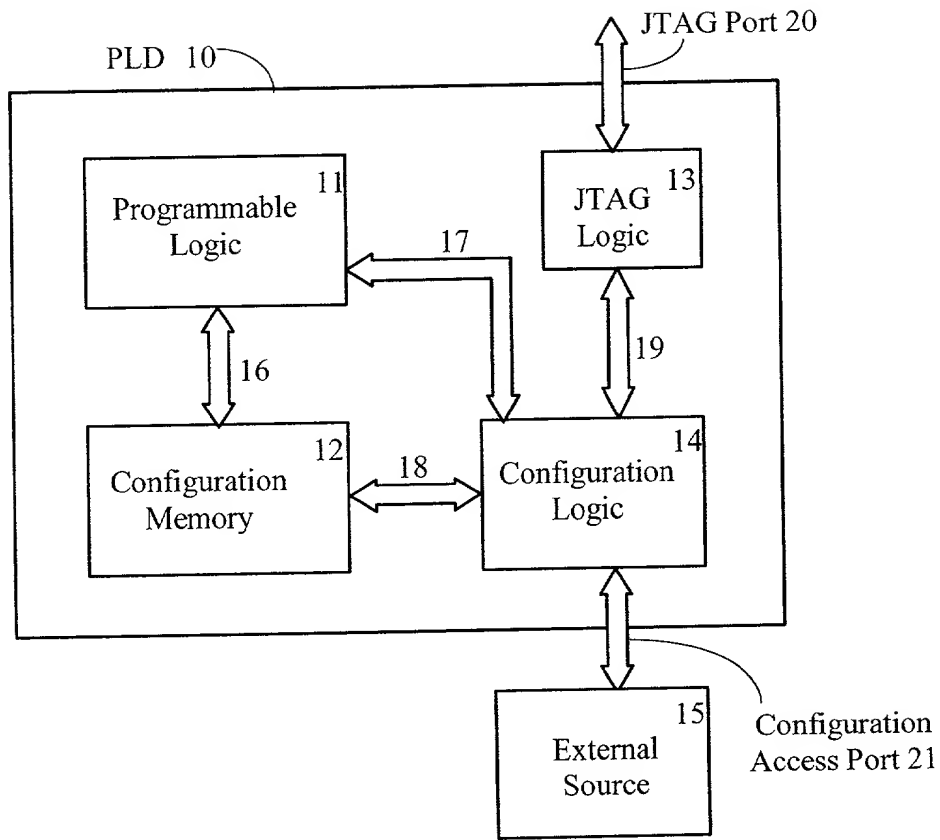**Fig. 1**

PRIOR ART

Header A
Data A
Header B
Data 1B
Data 2B
Data 3B
Data 4B
Header C
Data 1C
⋮

Fig. 2a
PRIOR ART

Bitstream header Config. Logic Reg. address	Config. Logic Register data contents
0000	Cyclic Redundancy Check (CRC)
0001	Frame Address
0010	Frame Data Input
0011	Frame Data Output
0100	Command
0110	Control
0111	Status
1000	Daisy Chain Output
1001	Configuration Option
1010	Reserved
1011	Frame Length
1100	Reserved
1101	Reserved
1110	Reserved
1111	Reserved

Fig. 2d
PRIOR ART

32-bit Command Header Format 1

Format Type	Op code	Config. Logic Register address	Word count
001	00 01 10		

Fig. 2b PRIOR ART

11 bits, counts 2048 words

32-bit Command Header Format 1

Format Type	Op code	Config. Logic Register Address	Word Count
001	00 01 10		000000000000

32-bit Command Header Format 2

Format Type	Op code	Word Count
010	00 01 10	

27 bits, counts 2.68 million words or 10 megabytes

Fig. 2c PRIOR ART

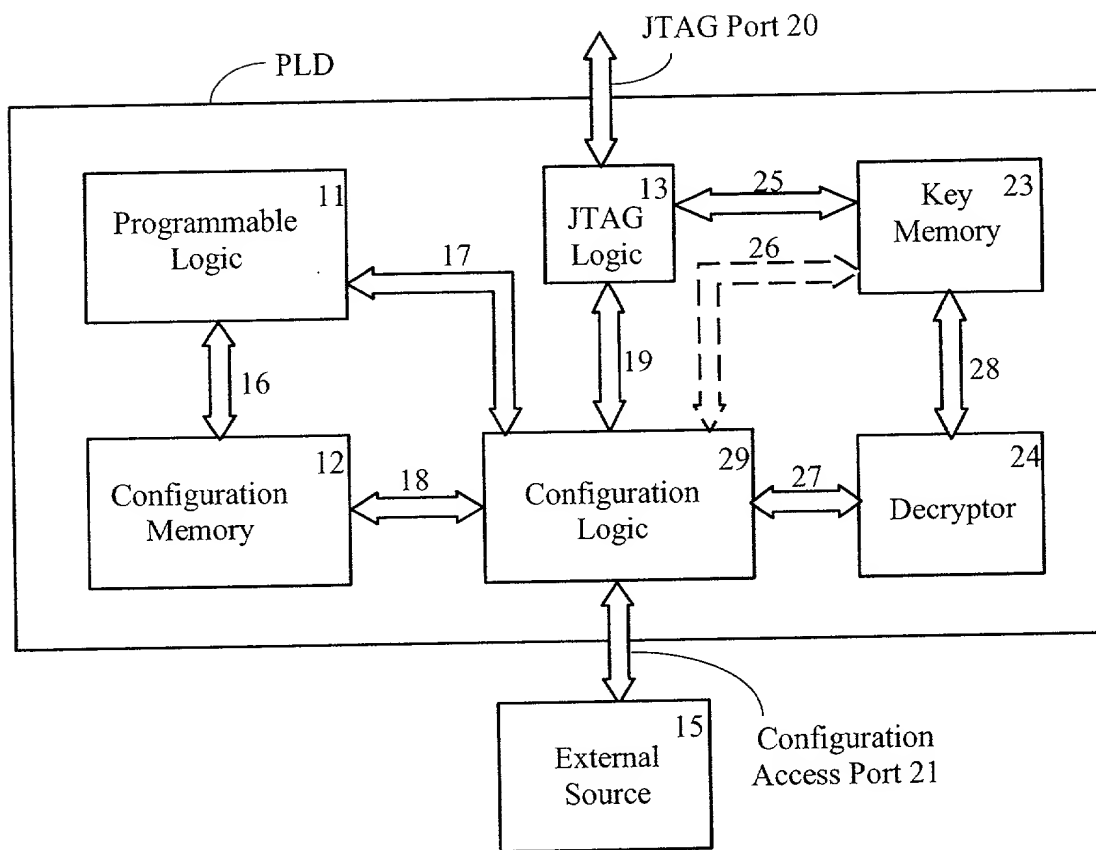


Fig. 3

Header A
Data A
Header B
Data B
Header C
Data C
Header D
Data 1D
Data 2D
Data 3D
⋮

Fig. 4a

Bitstream header Config. Logic Reg. address	Config. Logic Register data contents
0000	Cyclic Redundancy Check (CRC)
0001	Frame Address
0010	Frame Data Input
0011	Frame Data Output
0100	Command
0110	Control
0111	Status
1000	Daisy Chain Output
1001	Configuration Option
1010	Reserved
1011	Frame Length
1100	Cipher block chaining(CBC) starter
1101	Initial key address
1110	Reserved
1111	Reserved

Fig. 4d

32-bit Command Header Format 1

Format Type	Op code	Config. Logic Register address	Word count
001	00 01 10 11		

Fig. 4b

11 bits, counts 2048 words

32-bit Command Header Format 1

Format Type	Op code	Config. Logic Register Address	Word Count
001	00 01 10 11		00000000000

32-bit Command Header Format 2

Format Type	Op code	Word Count
010	00 01 10 11	

Fig. 4c

27 bits, counts 2.68 million words or 10 megabytes

```

Dummy word 11111111111111111111111111111111
Sync word 1010101010011001010101010101100110
Type 1 write 1 words to CMD 001100000000000001000000000000001
RCRC command 0000000000000000000000000000000111
Type 1 write 1 words to FLR 0011000000000000101100000000000001
data word 0 000000000000000000000000000000011001
Type 1 write 1 words to COR 001100000000000010010000000000001
data word 0 000000000000001000011111111000001
Type 1 write 1 words to ID 0011000000000000111000000000000001
data word 0 00000001000000001000000010010011
Type 1 write 1 words to MASK 0011000000000000011000000000000001
data word 0 0000000000000000000000000000000000
Type 1 write 1 words to CMD 0011000000000000010000000000000001
SWITCH command 000000000000000000000000000000001001
Type 1 write 1 words to FAR 001100000000000000100000000000001
data word 0 0000000000000000000000000000000000
Type 1 write 1 words to CMD 0011000000000000010000000000000001
WCFG command 0000000000000000000000000000000001
Type 1 write 0 words to FDRI 0011000000000000010000000000000000
Type 2 write 10530 words to FDRI 010100000000000000010100100100010
      data word 0 0000000000000000000000000000000000
      data word 1 0000000000000000000000000000000000
      data word 2 0000100000000000000000000000000000
      data word 3 000010000000000011111111111111100
          .
          .
          .

      data word 10526 00000000000000000000000000000000
      data word 10527 00000000001000000000000000000001
      data word 10528 00000000000000000000000000000000
      data word 10529 00000000000000000000000000000000
Auto CRC word 000000000000000000110111000010001
Type 1 write 1 words to CMD 001100000000000001000000000000001
LFRM command 0000000000000000000000000000000011
Type 1 NO OP 0010000000000000000000000000000000
    .
    .
    .

Type 1 NO OP 0010000000000000000000000000000000
Type 1 write 1 words to COR 0011000000000000100100000000000001
data word 0 000000010000010000000111111000001
Type 1 write 1 words to CMD 0011000000000000010000000000000001
START command 000000000000000000000000000000000101
Type 1 write 1 words to CTL 00110000000000000001010000000000001
data word 0 0000000000000000000000000000000000
Type 1 write 1 words to CMD 0011000000000000010000000000000001
GRESTORE command 000000000000000000000000000000001010
Type 1 write 1 words to CRC 0011000000000000000000000000000001
data word 0 00000000000000000000010100100110010
Type 1 write 1 words to CMD 001100000000000000001000000000000001
DESYNCH command 000000000000000000000000000000001101
Type 1 NO OP 0010000000000000000000000000000000

```

	1990	1991	1992	1993	1994	1995	1996	1997	1998	1999	2000	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029	2030	2031	2032	2033	2034	2035	2036	2037	2038	2039	2040	2041	2042	2043	2044	2045	2046	2047	2048	2049	2050	2051	2052	2053	2054	2055	2056	2057	2058	2059	2060	2061	2062	2063	2064	2065	2066	2067	2068	2069	2070	2071	2072	2073	2074	2075	2076	2077	2078	2079	2080	2081	2082	2083	2084	2085	2086	2087	2088	2089	2090	2091	2092	2093	2094	2095	2096	2097	2098	2099	2100	2101	2102	2103	2104	2105	2106	2107	2108	2109	2110	2111	2112	2113	2114	2115	2116	2117	2118	2119	2120	2121	2122	2123	2124	2125	2126	2127	2128	2129	2130	2131	2132	2133	2134	2135	2136	2137	2138	2139	2140	2141	2142	2143	2144	2145	2146	2147	2148	2149	2150	2151	2152	2153	2154	2155	2156	2157	2158	2159	2160	2161	2162	2163	2164	2165	2166	2167	2168	2169	2170	2171	2172	2173	2174	2175	2176	2177	2178	2179	2180	2181	2182	2183	2184	2185	2186	2187	2188	2189	2190	2191	2192	2193	2194	2195	2196	2197	2198	2199	2200	2201	2202	2203	2204	2205	2206	2207	2208	2209	2210	2211	2212	2213	2214	2215	2216	2217	2218	2219	2220	2221	2222	2223	2224	2225	2226	2227	2228	2229	2230	2231	2232	2233	2234	2235	2236	2237	2238	2239	2240	2241	2242	2243	2244	2245	2246	2247	2248	2249	2250	2251	2252	2253	2254	2255	2256	2257	2258	2259	2260	2261	2262	2263	2264	2265	2266	2267	2268	2269	2270	2271	2272	2273	2274	2275	2276	2277	2278	2279	2280	2281	2282	2283	2284	2285	2286	2287	2288	2289	2290	2291	2292	2293	2294	2295	2296	2297	2298	2299	2300	2301	2302	2303	2304	2305	2306	2307	2308	2309	2310	2311	2312	2313	2314	2315	2316	2317	2318	2319	2320	2321	2322	2323	2324	2325	2326	2327	2328	2329	2330	2331	2332	2333	2334	2335	2336	2337	2338	2339	2340	2341	2342	2343	2344	2345	2346	2347	2348	2349	2350	2351	2352	2353	2354	2355	2356	2357	2358	2359	2360	2361	2362	2363	2364	2365	2366	2367	2368	2369	2370	2371	2372	2373	2374	2375	2376	2377	2378	2379	2380	2381	2382	2383	2384	2385	2386	2387	2388	2389	2390	2391	2392	2393	2394	2395	2396	2397	2398	2399	2400	2401	2402	2403	2404	2405	2406	2407	2408	2409	2410	2411	2412	2413	2414	2415	2416	2417	2418	2419	2420	2421	2422	2423	2424	2425	2426	2427	2428	2429	2430	2431	2432	2433	2434	2435	2436	2437	2438	2439	2440	2441	2442	2
--	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	---

 ENCRYPTED VERSION

```

      Dummy word 11111111111111111111111111111111
      Sync word 1010101010011001010101010100110
Type 1 write 1 words to CMD 00110000000000001000000000000001
      RCRC command 0000000000000000000000000000000111
Type 1 write 1 words to FLR 0011000000000000101100000000000001
      data word 0 000000000000000000000000000000011001
Type 1 write 1 words to COR 0011000000000000100100000000000001
      data word 0 00000000000001000011111111000001
Type 1 write 1 words to ID 00110000000000011100000000000001
      data word 0 00000001000000001000000010010011
Type 1 write 1 words to MASK 00110000000000011000000000000001
      data word 0 0000000000000000000000000000000000
Type 1 write 1 words to CMD 00110000000000001000000000000001
      SWITCH command 000000000000000000000000000001001
Type 1 write 1 words to FAR 00110000000000000100000000000001
      data word 0 0000000000000000000000000000000000
Type 1 write 1 words to CMD 00110000000000001000000000000001
      WCFG command 0000000000000000000000000000000001
Type 1 write 1 word to KEY ADDR 00110000000000011000000000000001
      data word 0 0000000000000000000000000000000000
Type 1 write 2 words to CBC 00110000000000011010000000000010
      data word 0 10010000101010111100110111101111
      data word 1 00010010001101000101011001111000
Type 1 decrypt 0 words to FDRI 00111000000000000100000000000000
Type 2 dec 10530 words to FDRI 01011000000000000010100100100010
      data word 0 000101011101101100110010100101001000
      data word 1 111000001110001101111111101100111
      data word 2 101010100111110111100011001100111
      data word 3 01100001101011100001011010110100
      .
      .
      .
data word 10526 01011001101111101100010101001010
data word 10527 00101001010111111101011110110000
data word 10528 11000000001010100110011000101010
data word 10529 01111111110010000001100011100010
      Auto CRC word 0000000000000000101111011001010
Type 1 write 1 words to CMD 00110000000000001000000000000001
      LFRM command 000000000000000000000000000000011
Type 1 NO OP 0010000000000000000000000000000000
      .
      .
      .
Type 1 NO OP 0010000000000000000000000000000000
Type 1 write 1 words to COR 00110000000000010010000000000001
      data word 0 00000000000001000011111111000001
Type 1 write 1 words to CMD 00110000000000001000000000000001
      START command 0000000000000000000000000000000101
Type 1 write 1 words to CTL 00110000000000010100000000000001
      data word 0 0000000000000000000000000000000000
Type 1 write 1 words to CMD 00110000000000001000000000000001
      GRESTORE command 000000000000000000000000000001010
Type 1 write 1 words to CRC 00110000000000000000000000000001
      data word 0 000000000000000000000001010111001111
Type 1 write 1 words to CMD 00110000000000001000000000000001
      DESYNCH command 000000000000000000000000000001101
Type 1 NO OP 0010000000000000000000000000000000

```

Fig. 5b

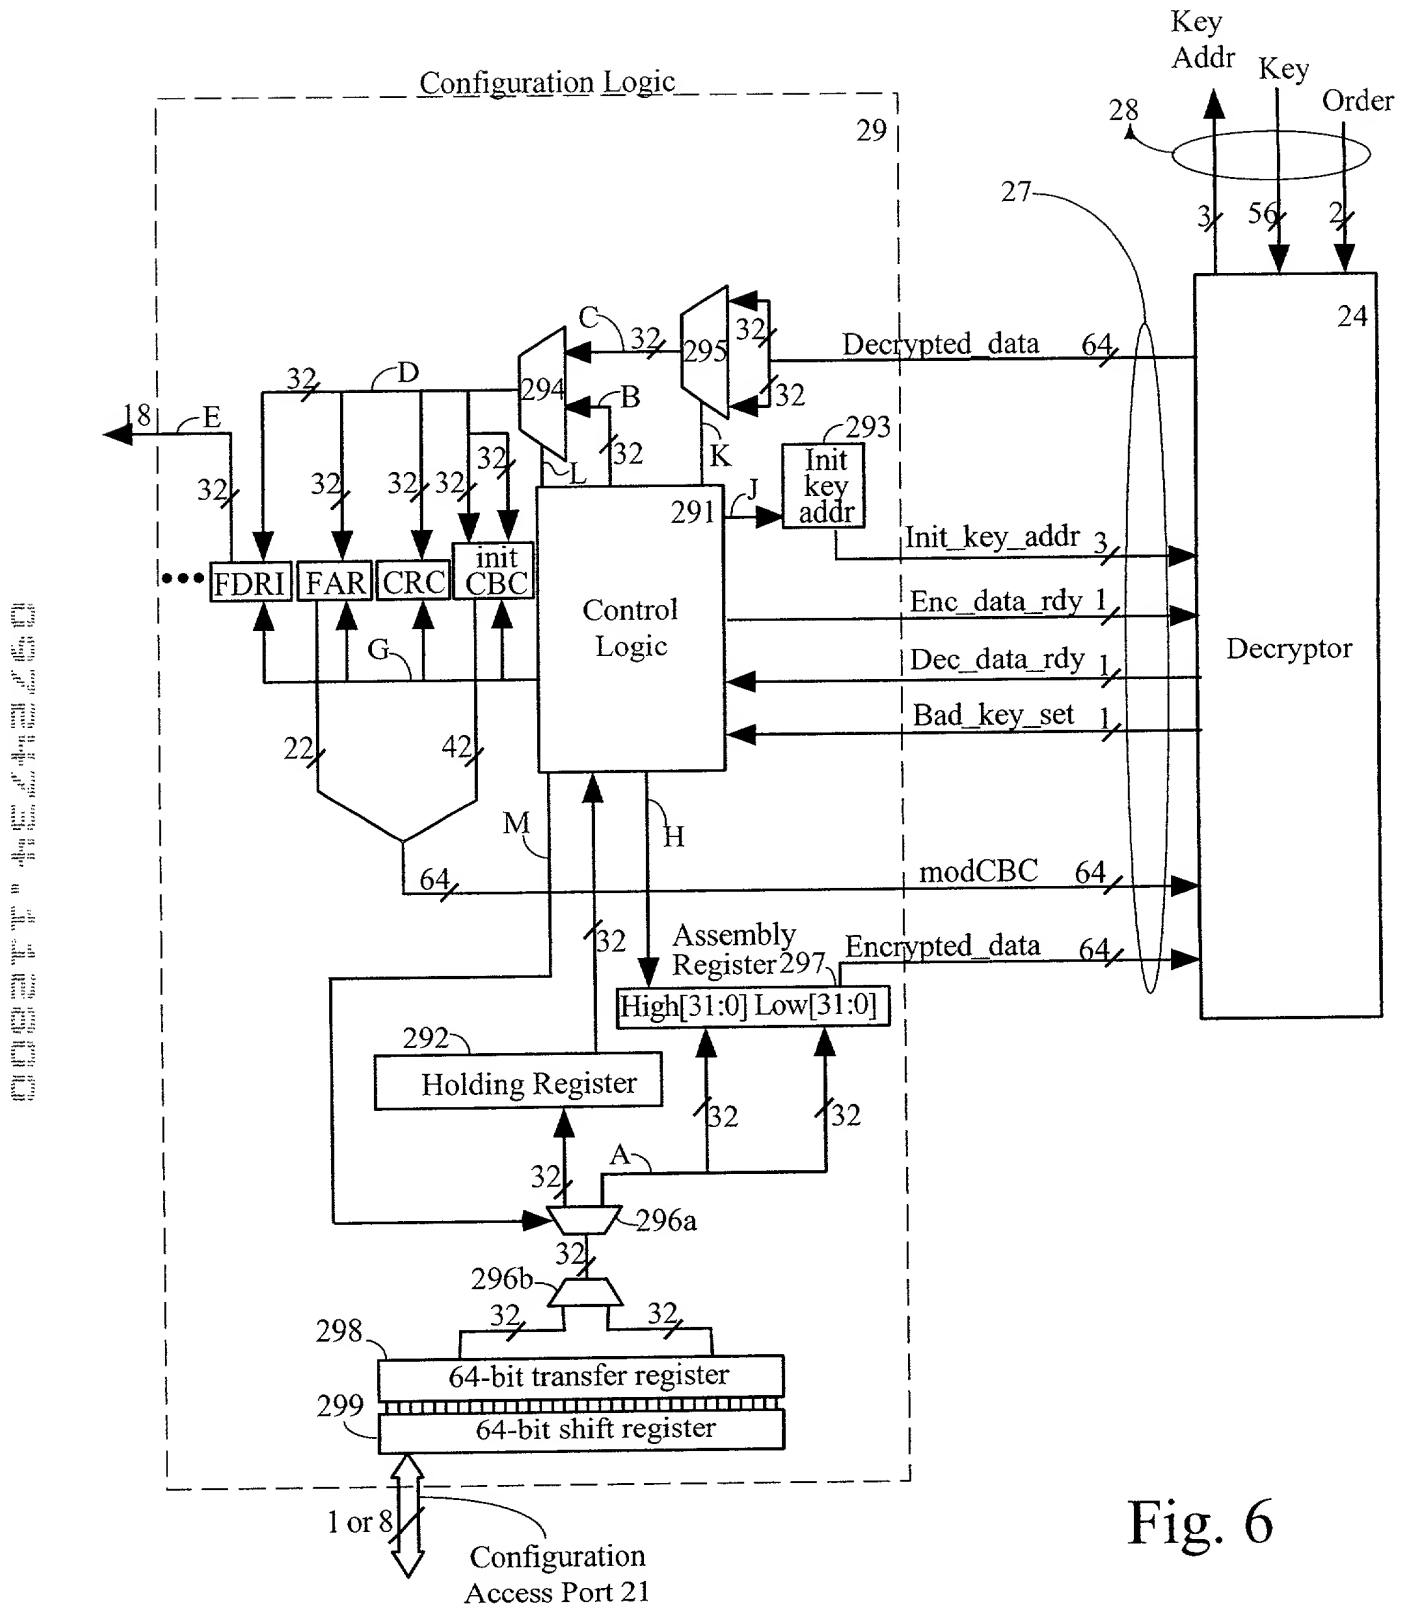


Fig. 6

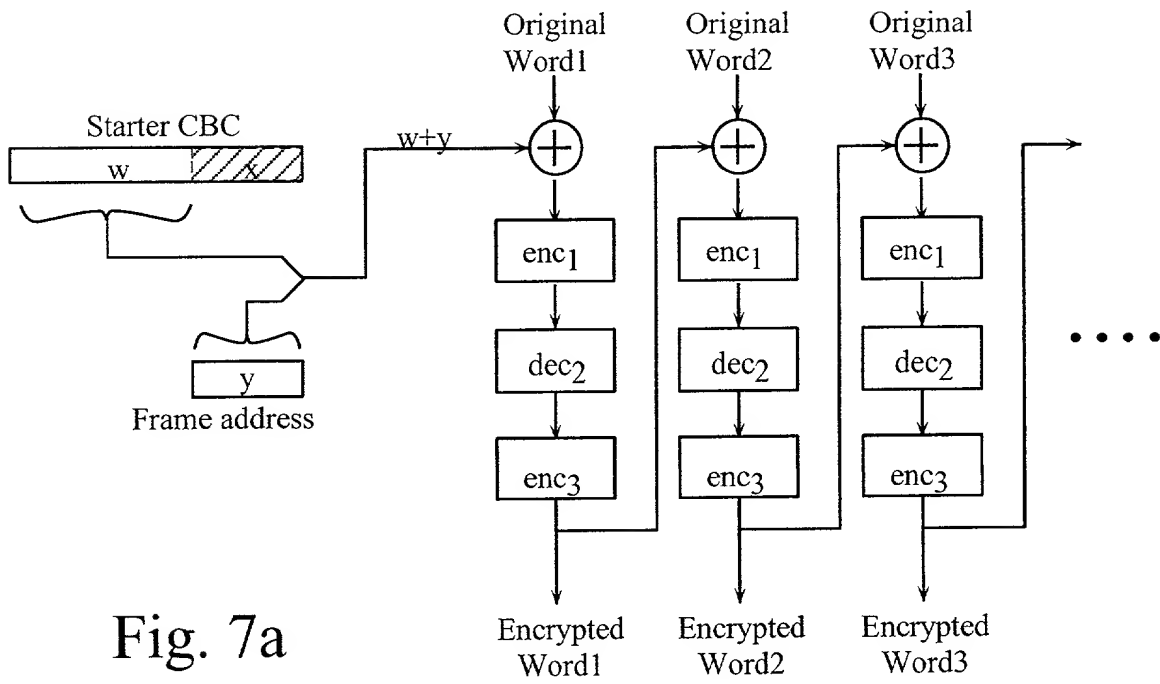


Fig. 7a

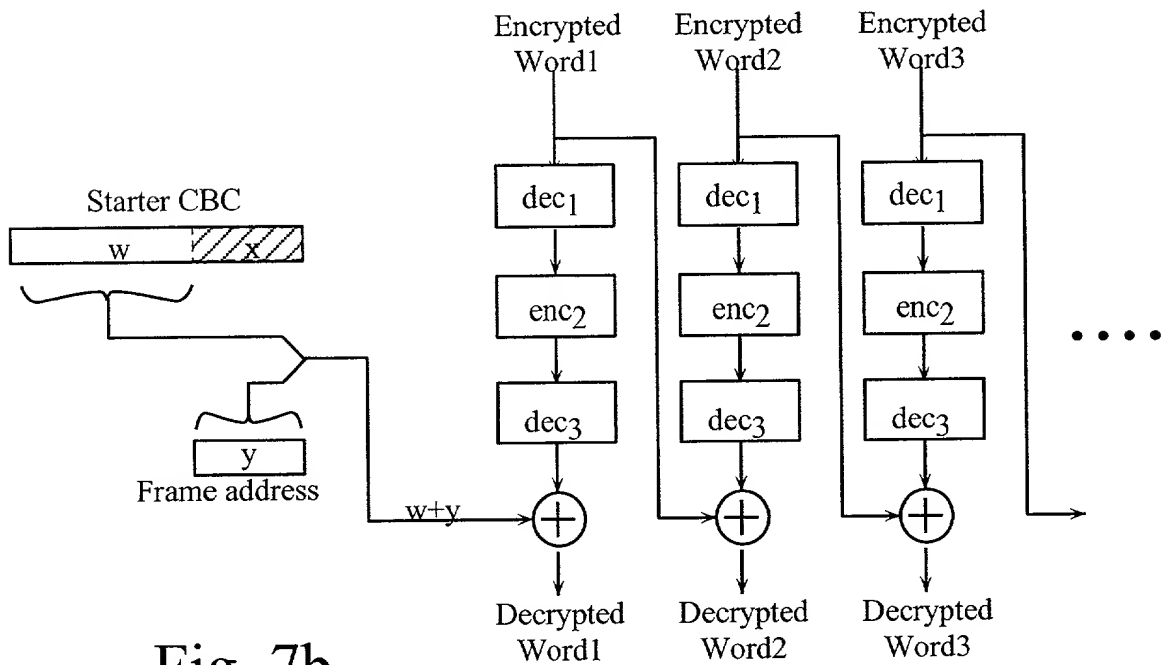


Fig. 7b

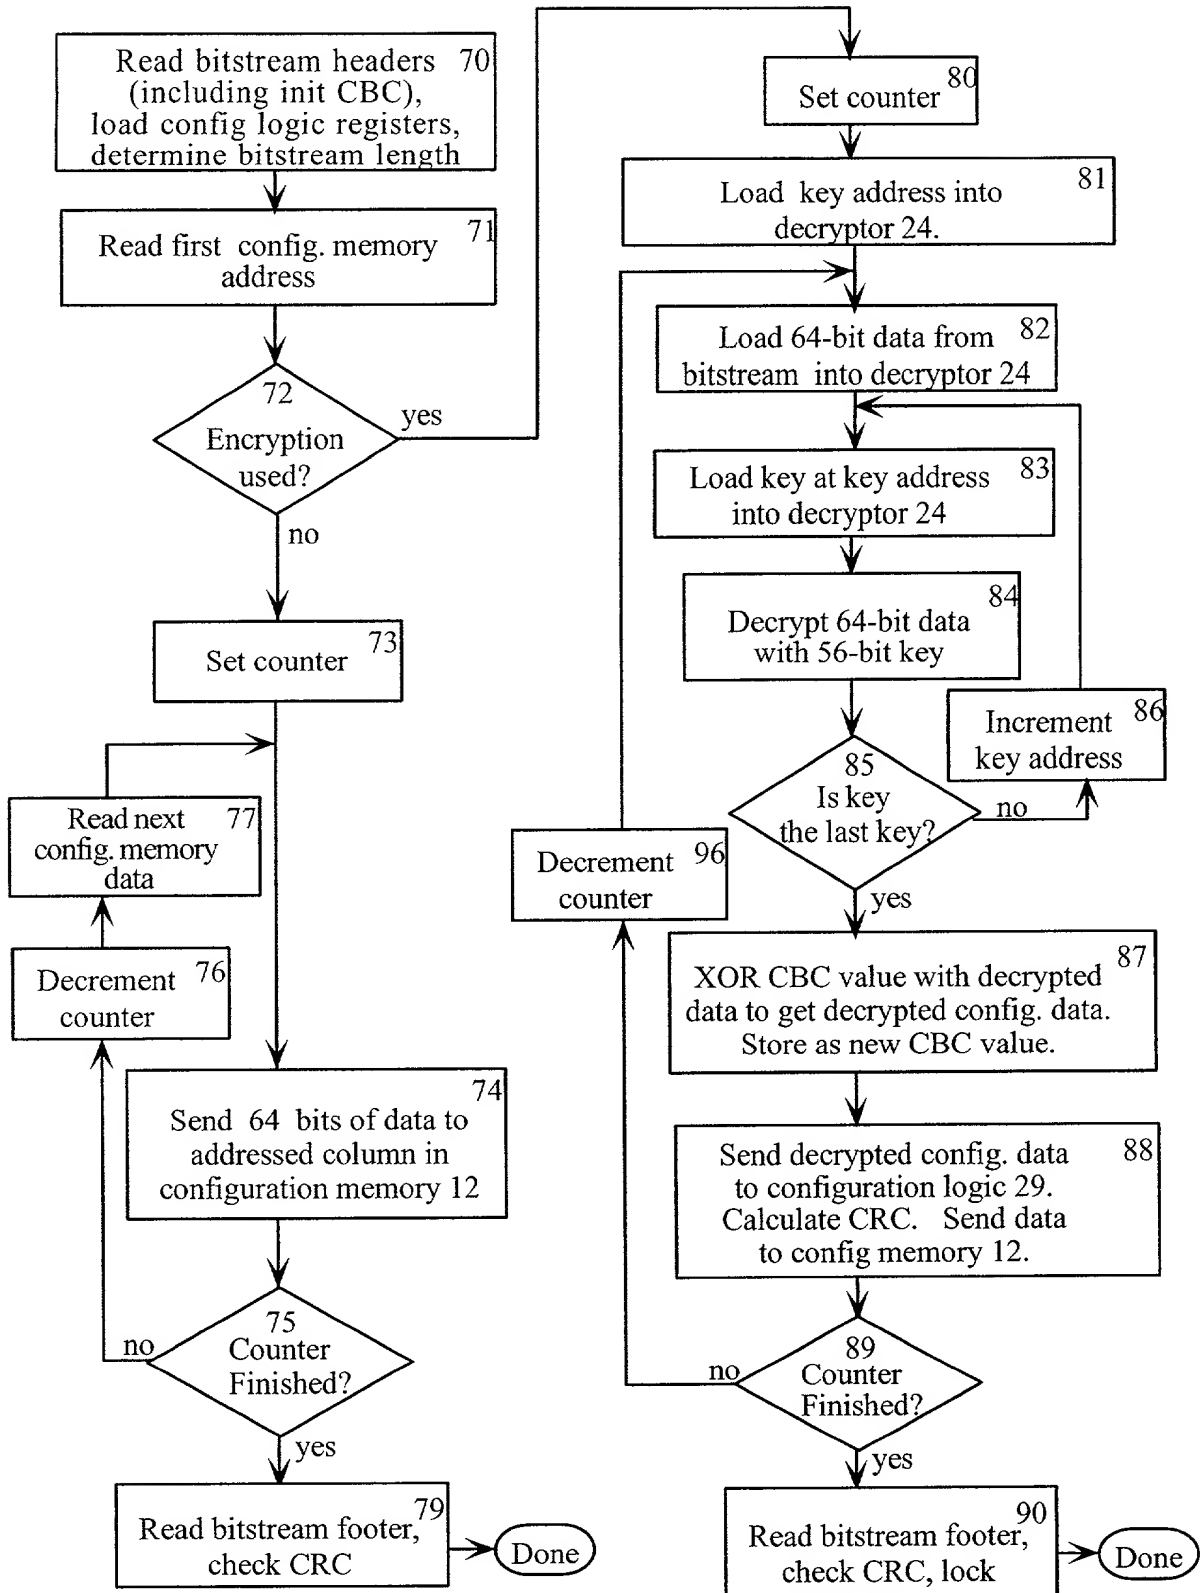


Fig. 8

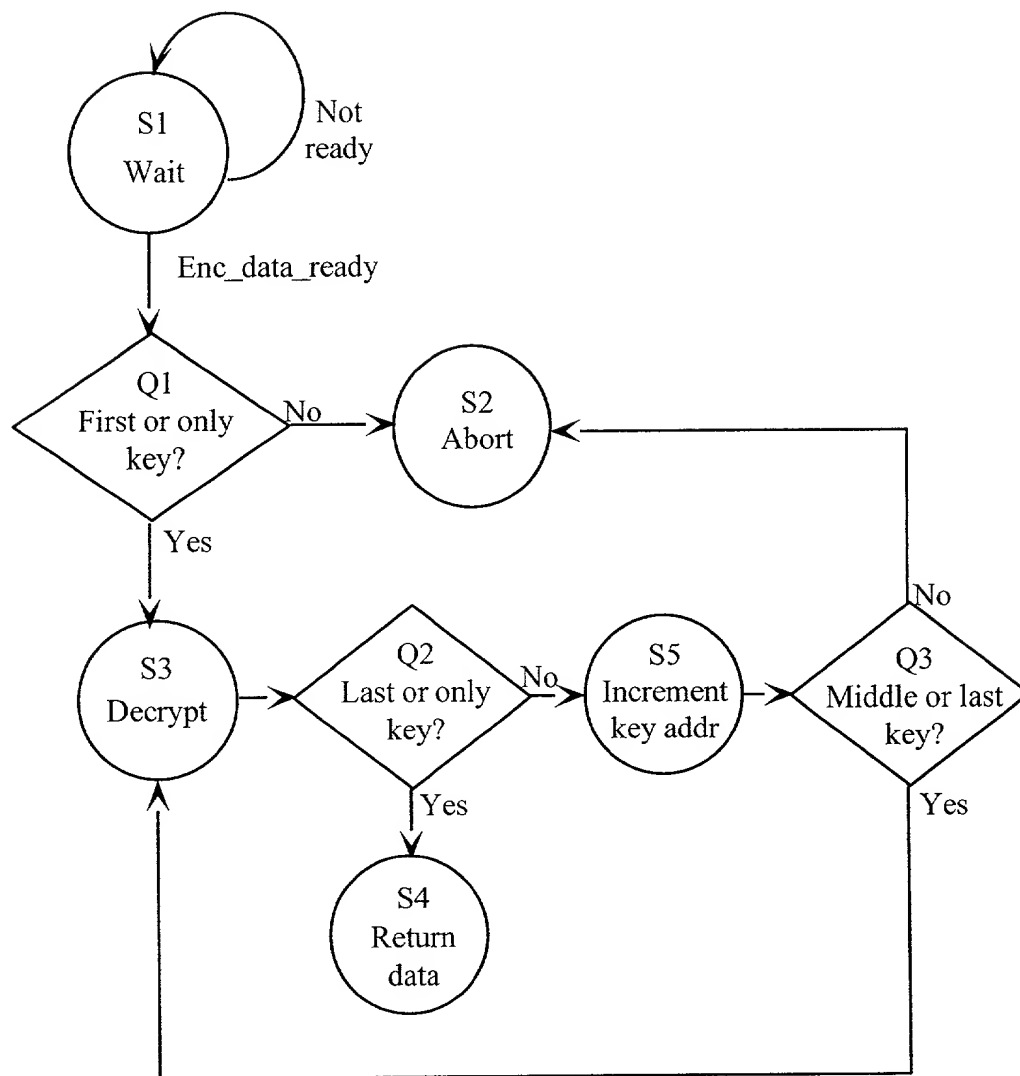


Fig. 9

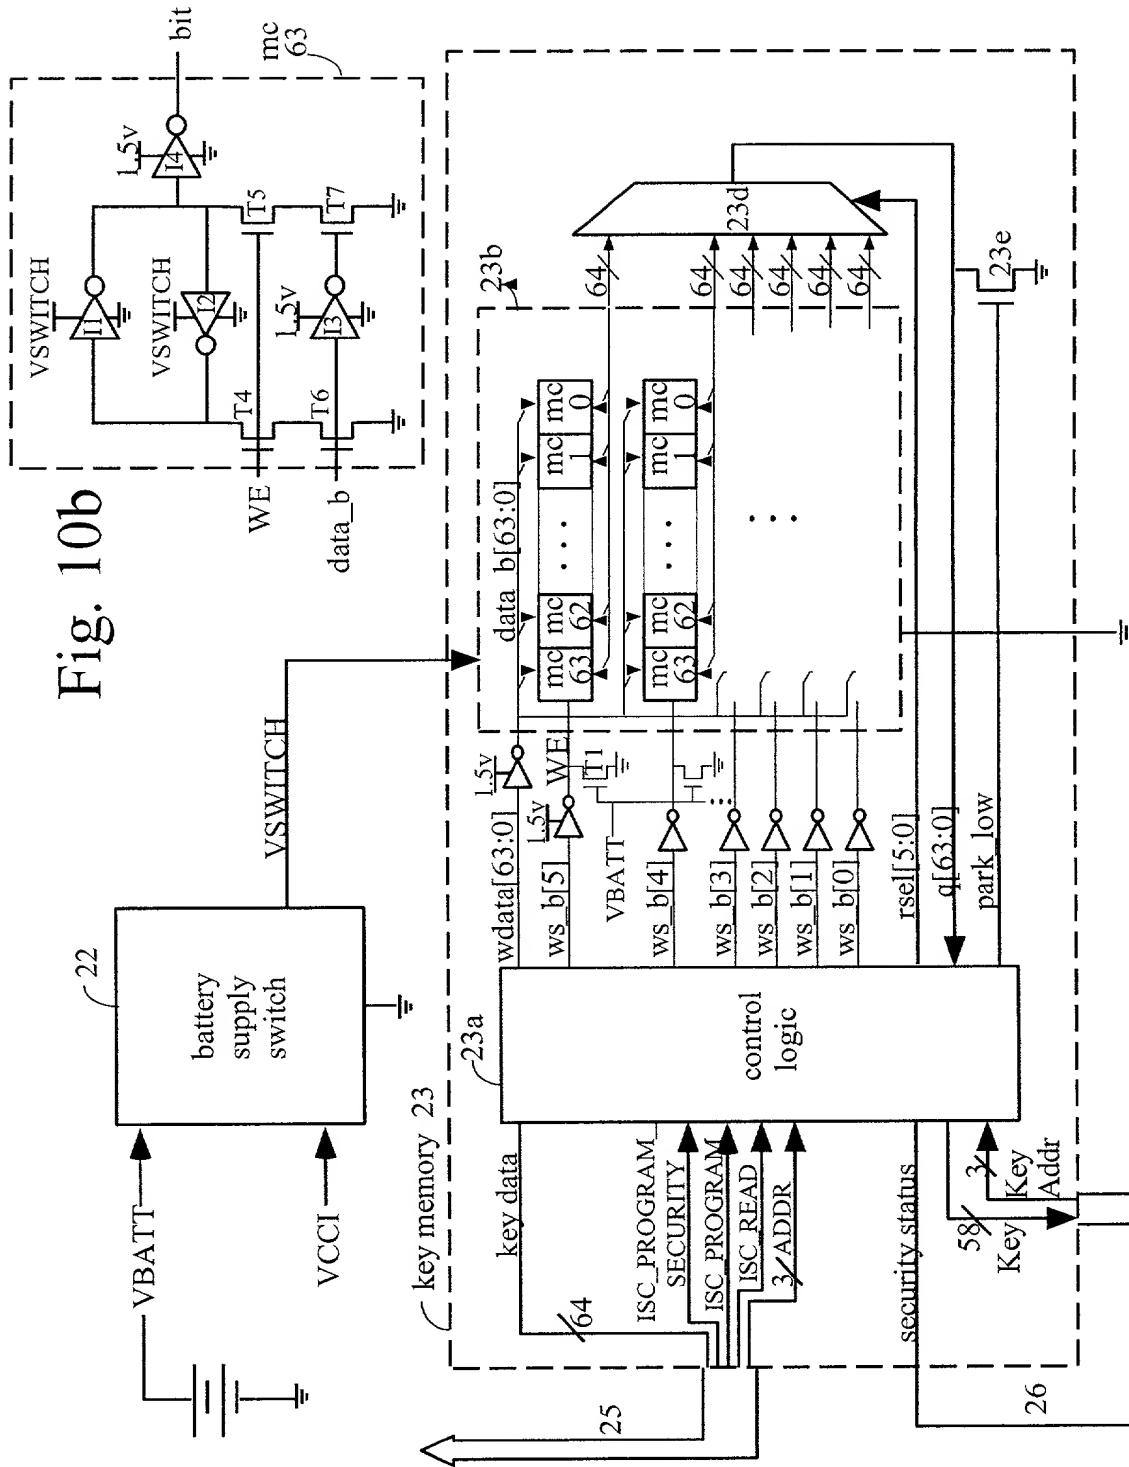


Fig. 10a

Fig. 10b

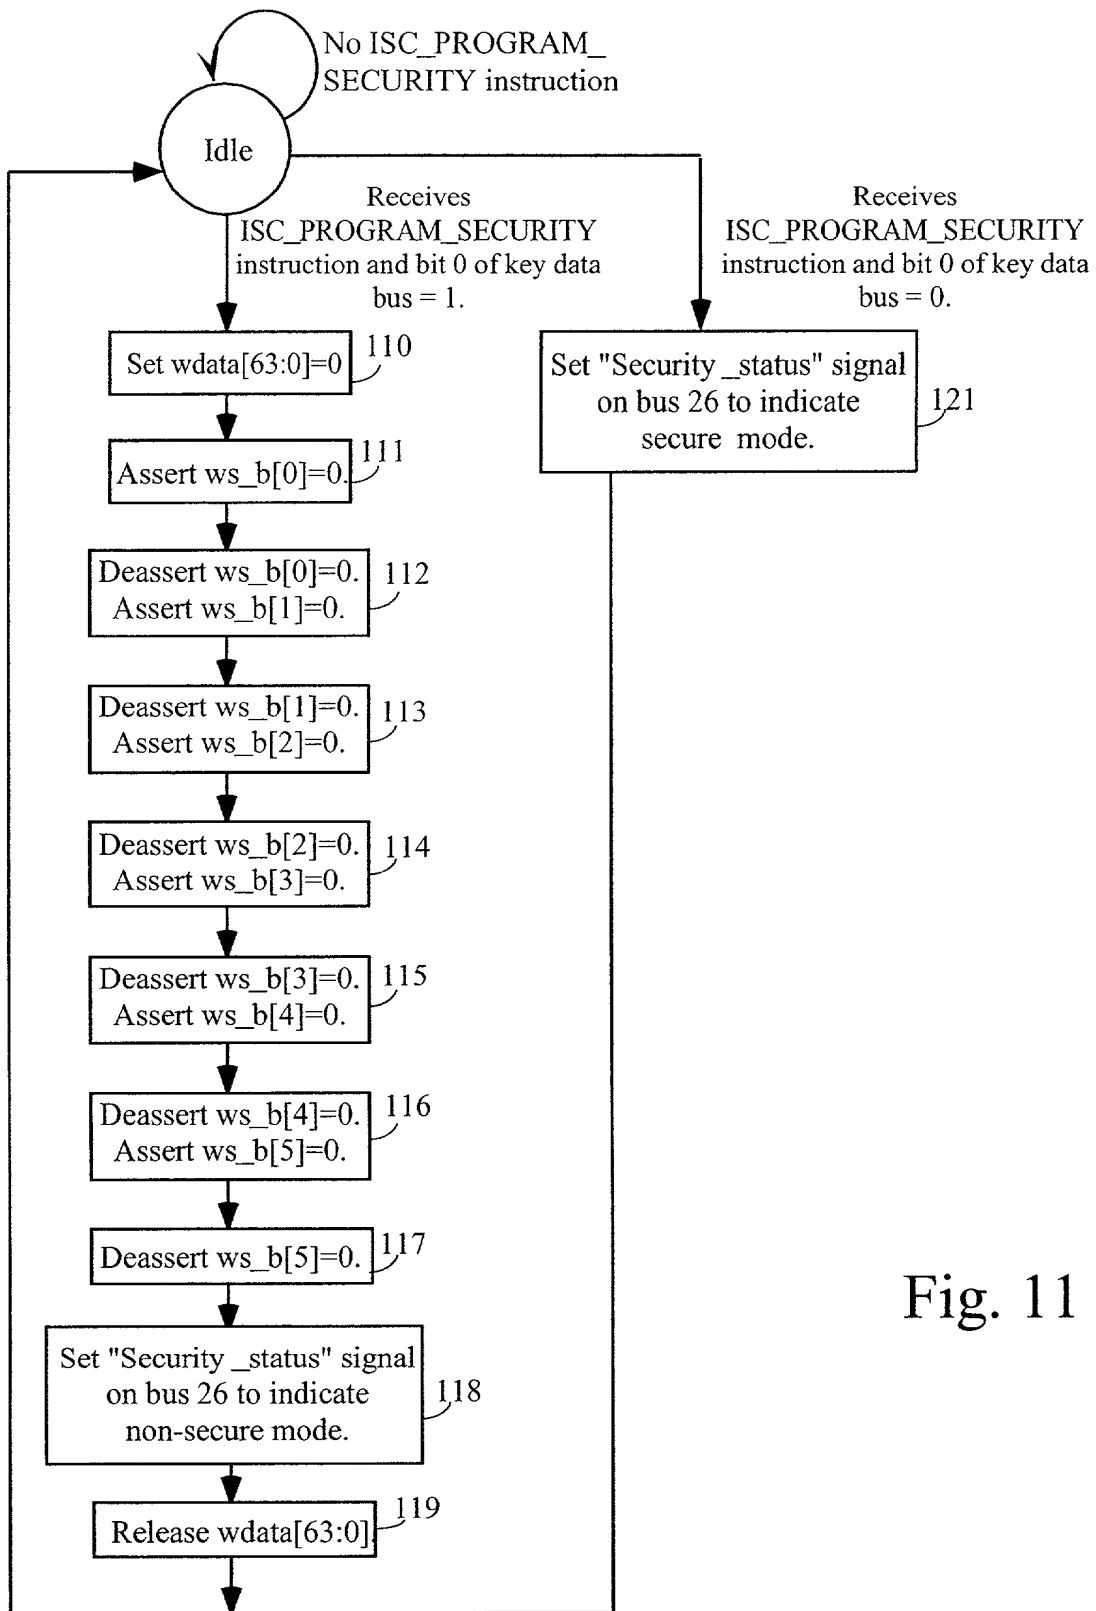


Fig. 11

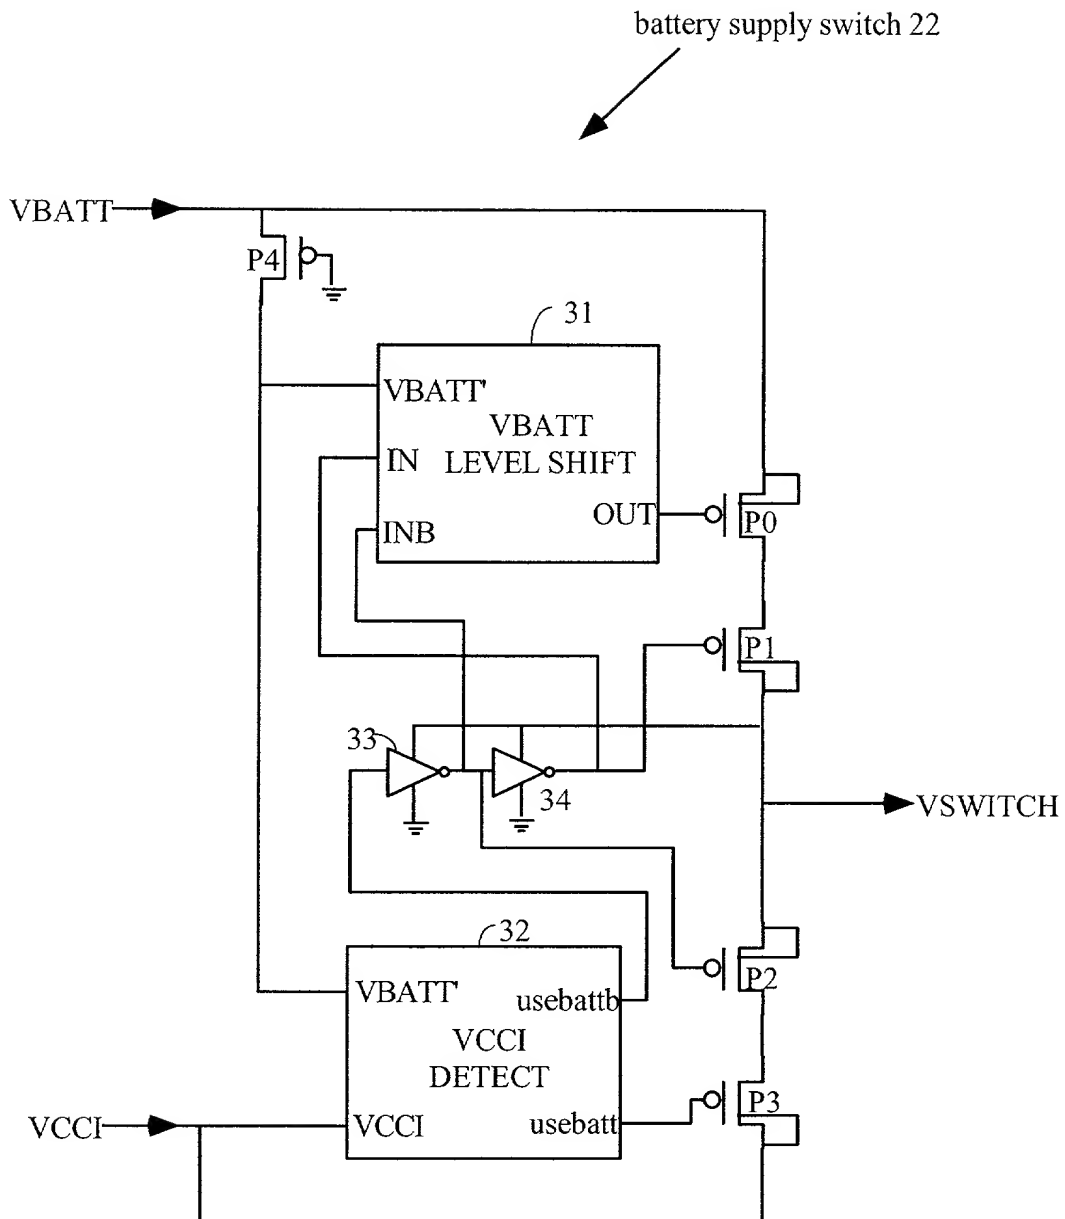


Fig. 12

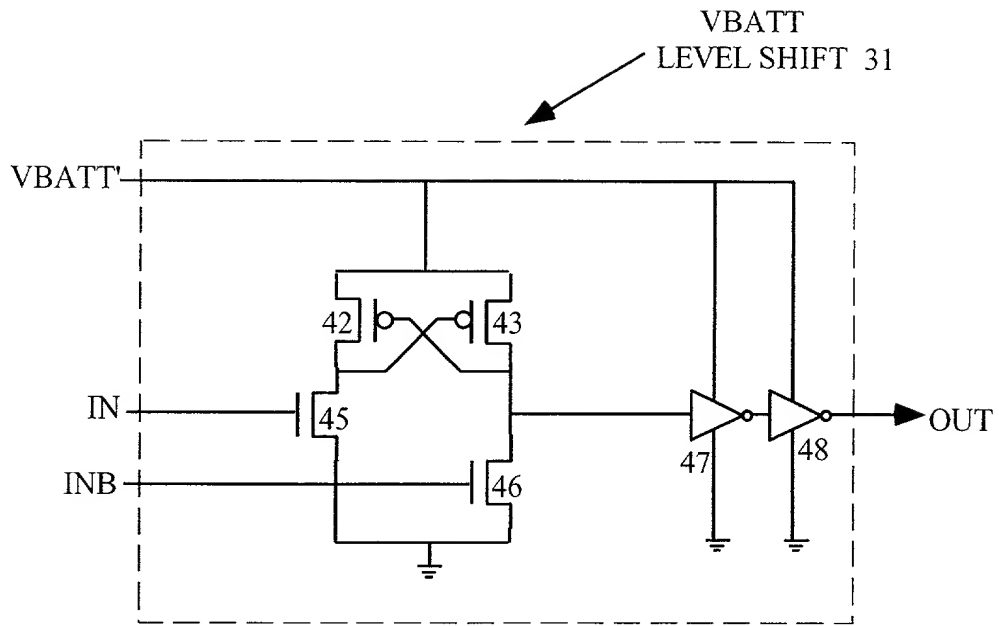


Fig. 13

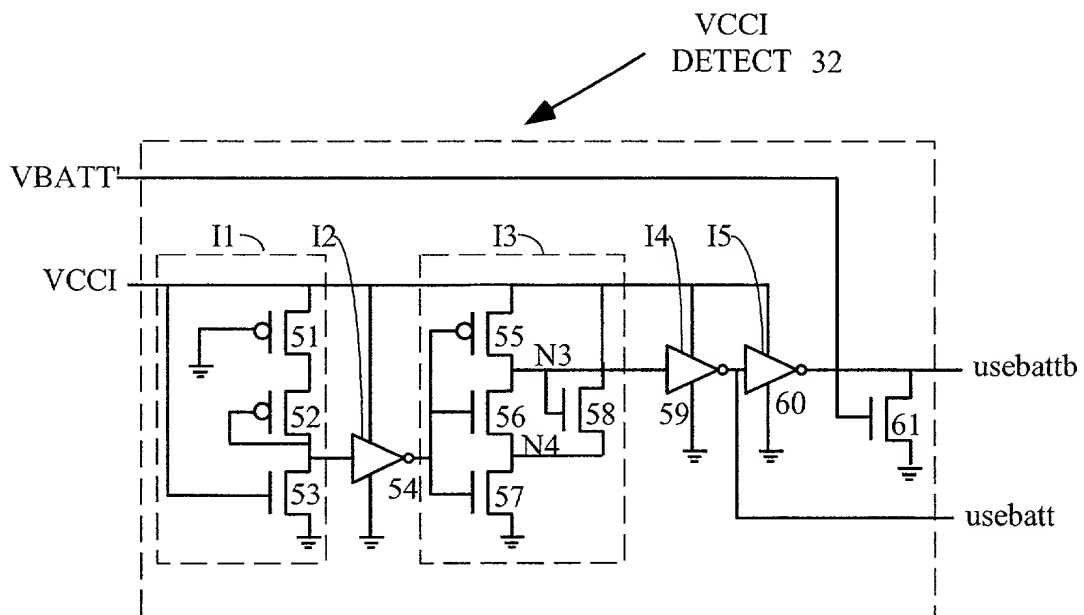


Fig. 14

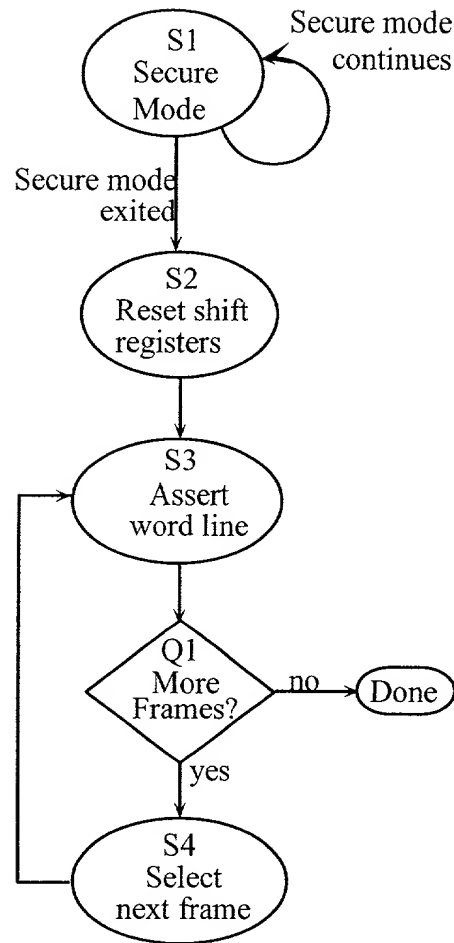


Fig. 15

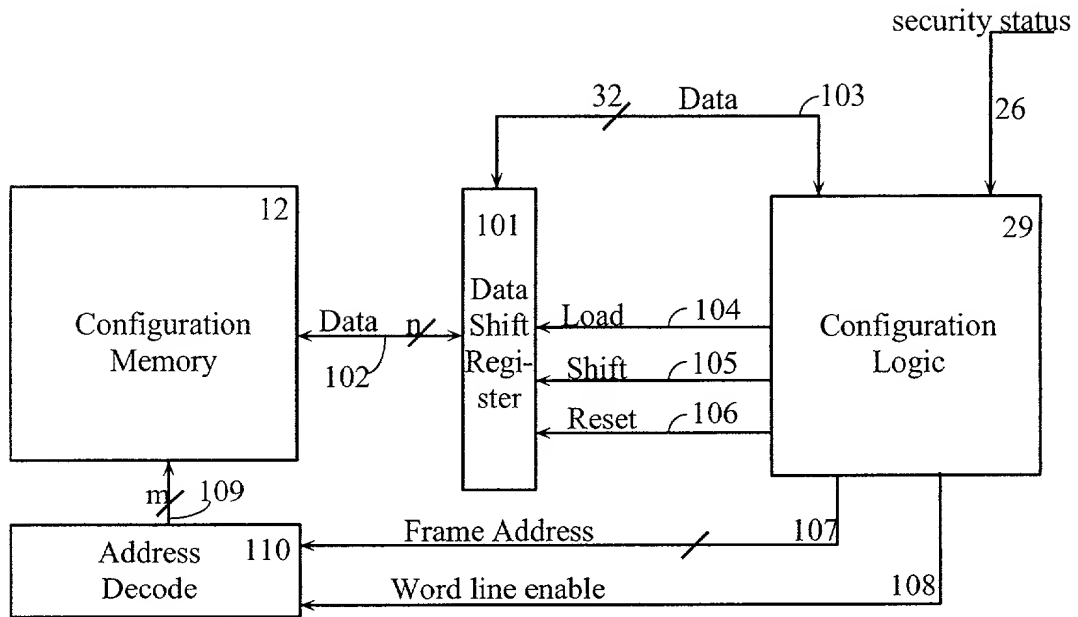


Fig. 16

DECLARATION FOR PATENT APPLICATION

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below adjacent to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of subject matter (process, machine, manufacture, or composition of matter, or an improvement thereof) that is disclosed and/or claimed and for which a patent is solicited by way of the application entitled

BITSTREAM FOR CONFIGURING A PLD WITH ENCRYPTED DESIGN DATA

which (check)

- ☒ is attached hereto.
☐ and is amended by the Preliminary Amendment attached thereto.
☐ was filed on _____ as Application Serial No. _____.
☐ and was amended on _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified application, including the claims, including portions amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, § 1.56(a).

I hereby claim foreign priority benefits under title 35, United States Code, § 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)			Priority Claimed	
			Yes	No
_____	_____	_____		
(Number)	(Country)	(Day/Month/Year Filed)		
_____	_____	_____		
(Number)	(Country)	(Day/Month/Year Filed)		

I hereby claim the benefit under 35 U.S.C. § 119(e) of any United States provisional application(s) listed below

(Application Number(s))	(Filing Date (MM/DD/YYYY))
_____	_____

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s) listed below and, insofar as any subject matter of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, § 1.56(a) which occurred between the filing date of the prior application(s) and the national or PCT international filing date of this application:

(Application Serial No.)	(Filing Date)	(Status-patented, pending, abandoned)
_____	_____	_____
_____	_____	_____


I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and to transact all business in the United States Patent and Trademark Office connected herewith:

Keith A. Chanroo (36,480), Edel M. Young (32,451), Lois D. Cartier (40,941), and H. C. Chan (35,477) all located at Xilinx, Inc., 2100 Logic Drive, San Jose, California 95124.

Address all telephone calls to: Edel M. Young at Telephone No. (408) 879-4969
Address all correspondence to: Edel M. Young
Xilinx, Inc.
2100 Logic Drive
San Jose, California 95124

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Title 18, United States Code, § 1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.


Full name of sole or first inventor Stephen M. Trimberger

Inventor's signature  Date 11/28/00

Residence 1261 Chateau Drive, San Jose, CA 95120 Citizenship United States

Post Office Address 1261 Chateau Drive, San Jose, CA 95120

Full name second inventor Raymond C. Pang

Inventor's signature  Date 11-28-00

Residence 1138 Falcon Ridge Court, San Jose, CA 95120 Citizenship United States

Post Office Address 1138 Falcon Ridge Court, San Jose, CA 95120

Full name third inventor Walter N. Sze

Inventor's signature  Date 11/28/00

Residence 20439 Kirkmont Drive, Saratoga, CA 95070 Citizenship United States

Post Office Address 20439 Kirkmont Drive, Saratoga, CA 95070

Full name fourth inventor Jennifer Wong

Inventor's signature  Date 11/28/00

Residence 40565 Encanto Way, Fremont, CA 94539 Citizenship United States

Post Office Address 40565 Encanto Way, Fremont, CA 94539

EMY:mom

DECLARATION FOR PATENT APPLICATION
(Additional Inventors)Full name of fifth inventor Kameswara K. RaoInventor's signature Kameswara K. Rao Date 11/28/2000Residence 1402 Graywood Drive, San Jose, CA 95129 Citizenship United StatesPost Office Address 1402 Graywood Drive, San Jose, CA 95129Full name sixth inventor N/A

Inventor's signature _____ Date _____

Residence _____ Citizenship _____

Post Office Address _____

Full name seventh inventor NA/

Inventor's signature _____ Date _____

Residence _____ Citizenship _____

Post Office Address _____

Full name eighth inventor NA/

Inventor's signature _____ Date _____

Residence _____ Citizenship _____

Post Office Address _____

Full name ninth inventor NA/

Inventor's signature _____ Date _____

Residence _____ Citizenship _____

Post Office Address _____

Full name tenth inventor N/A

Inventor's signature _____ Date _____

Residence _____ Citizenship _____

Post Office Address _____